



SALA Detachable, Aluminium, twist lock Karabiner for use with fall arrest equipment.

Description

Sala connectors ensure there are no weak links in the worlds premier safety systems.

This detachable karabiner can be attached to spliced or webbing lanyards, and other PPE products.

The automatic gate closing and locking makes it an ideal choice when the user will opened and closed the connector many timed during work period.

Main features

- Light weight Aluminium alloy
- 21mm opening
- Automatic closing and locking
- ¼ turn twist lock gate
- Double action security
- Quick and easy to open with one hand
- Easily used by left and right handed persons
- Detachable
- Marked with Batch reference for easier quality assurance traceability.

Applications

Specially suited for work were the weight of equipment is of uppermost important

Ideally suited for work in the following areas:-

- Rescue
- Rope access



CE

Associated Products

Can be used in association with:-

KE5175R Splices rope lanyard

KE5125W, KE5175W Webbing lanyard

KE5125X, KE5175X Expander lanyard

KA1RDS30, KA1RDS60, KA1RDS90

Rapid Deployment System (RDS) 30m, 60m and 90m versions.

KJ5024


(R-024)



SALA Detachable, Aluminium, twist lock Karabiner for use with fall arrest equipment.

Technical specification

- Material - forged light alloy
- Body and gate Surface finish – polished
- Locking Barrel finish – anodized blue
- Height – 125mm
- Width – 75mm
- Net Weight - 100g
- CE marked – Yes
- Conforms to standard – EN362
- Breaking Strength – 25kN
- Marking - Quality control batch reference
- Marked - breaking Strength

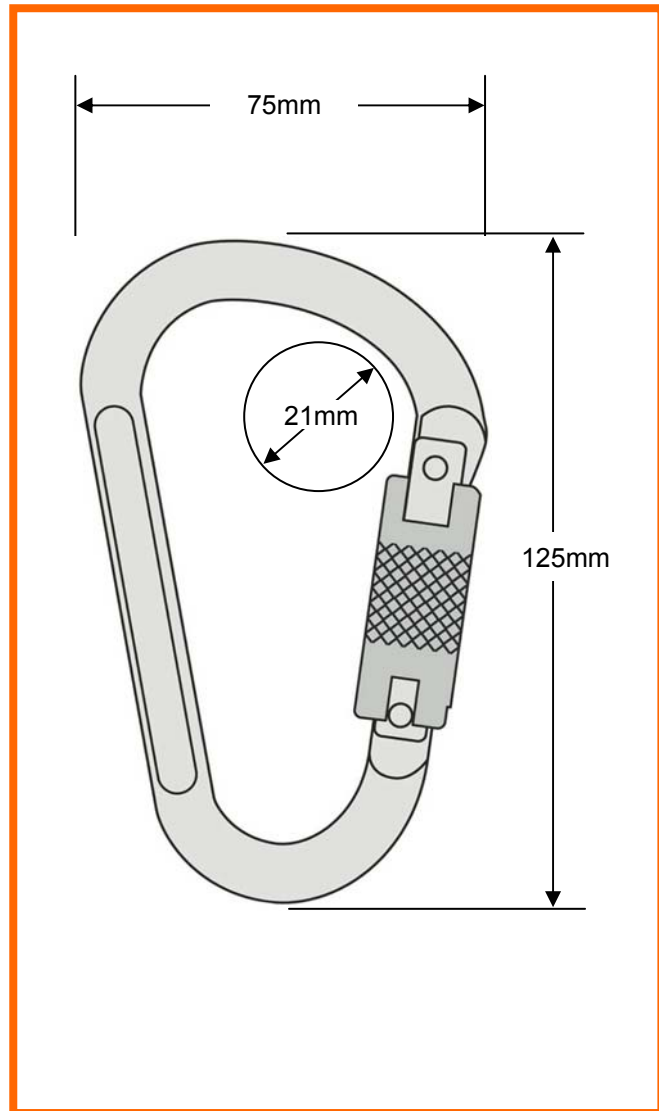

Options

KJ5107

Detachable steel Karabiner with 20mm opening. High Breaking strength 45kN

KJ5106

Detachable steel Karabiner with 33mm opening. High Breaking strength 45kN