




Yoke Grade 8 Component Connector BS EN1677-1+2

The William Hackett Grade 8 forged lifting components are manufactured by YOKE from alloy steel in accordance with EN1677. All forged components are individually m load limit in accordance with E EN818-4. The William Hackett

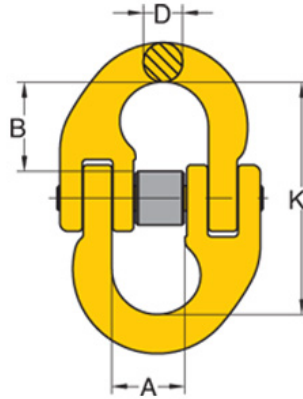

individually proof load tested to 2.5 times working f EN1677 can be used in chain slings certified to :rature range of -40°C up to 200°C without

reduction in working load limit.

METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	B mm	D mm	K mm	WLL tonnes	Box Quantity	Mass Kg
8-015-07	7, 8	18	22	9	57	2.00	150	0.20
8-015-10	10	25	26	11	68	3.15	50	0.30
8-015-13	13	30	35	16	91	5.30	35	0.70
8-015-16	16	36	38	19	100	8.00	20	1.10
8-015-20	18, 20	42	46	22	122	12.50	10	1.90
8-015-22	22	49	59	24	152	15.00	6	3.00
8-015-26	26	55	62	30	162	21.20	3	5.00
8-015-32	32	69	79	36	202	31.50	2	9.00

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	B inch	D inch	K inch	WLL lbs	Box Quantity	Mass lbs
8-015-07	1/4 - 5/16	0.71	0.89	0.35	2.25	4500	150	0.40
8-015-10	3/8	0.99	1.06	0.50	2.68	7100	50	0.70
8-015-13	1/2	1.19	1.38	0.62	3.58	12000	35	1.50
8-015-16	5/8	1.42	1.51	0.75	3.94	18100	20	2.40
8-015-20	3/4	1.65	1.81	0.87	4.80	28300	10	4.20
8-015-22	7/8	1.93	2.32	0.94	5.98	34200	6	6.60
8-015-26	1	2.17	2.44	1.19	6.38	47700	3	10.40
8-015-32	1-1/4	2.72	3.11	1.42	7.96	72300	2	19.40

