




Yoke Grade 8 Eye Sling Hook with Latch BS EN1677-1+2

The William Hackett Grade 8 forged lifting components are manufactured by YOKE from alloy steel in accordance with EN1677. All forged components are individually magnaflux crack detected after heat treatment, they are then individually proof load tested to 2.5 times working load limit in accordance with EN1677. Only components fully compliant with all aspects of EN1677 can be used in chain slings certified to EN818-4. The William Hackett Grade 8 lifting components are suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

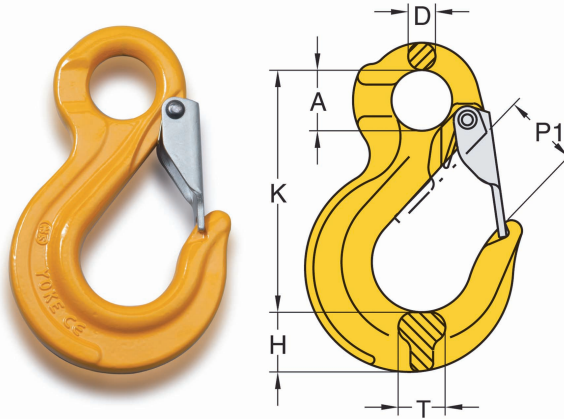

METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	D mm	H mm	K mm	P1 mm	T mm	WLL tonnes	Box Quantity	Mass Kg
8-044/S-07	7, 8	25	11	23	98	28	20	2.00	30	0.50
8-044/S-10	10	32	14	31	121	36	23	3.15	20	1.00
8-044/S-13	13	40	18	38	152	40	28	5.30	10	1.70
8-044/S-16	16	50	22	47	184	44	32	8.00	6	3.20
8-044/S-20	20	60	26	48	218	45	43	12.50	4	5.50
8-044/S-22	22	50	31	62	244	73	50	15.00	2	9.00
8-044/S-26	26	64	35	80	279	77	60	21.20	2	13.50
8-044/S-32	32	88	40	86	352	114	65	31.50	1	20.00

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	D inch	H inch	K inch	P1 inch	T inch	WLL lbs	Box Quantity	Mass lbs
8-044/S-07	1/4 - 5/16	0.98	0.43	0.91	3.86	1.18	0.75	4500	30	1.10
8-044/S-10	3/8	1.26	0.59	1.22	4.76	1.42	0.91	7100	20	2.00
8-044/S-13	1/2	1.57	0.71	1.50	5.98	1.69	1.10	12000	10	4.20
8-044/S-16	5/8	1.97	0.87	1.85	7.20	1.85	1.29	18100	6	7.10
8-044/S-20	3/4	2.36	1.06	1.89	8.54	1.77	1.69	28300	4	12.60
8-044/S-22	7/8	2.01	1.26	2.44	9.45	2.75	1.97	34200	2	20.10
8-044/S-26	1	2.60	1.34	3.15	10.63	3.15	2.36	47700	2	30.00
8-044/S-32	1-1/4	3.50	1.57	3.39	13.86	4.49	2.56	72300	1	41.20

