


Yoke Insulated Blank Swivels

Yoke Insulated Blank Swivels with Ball Bearing

The William Hackett Grade 8 forged lifting components are manufactured by YOKE from alloy steel in accordance with EN1677. All forged components are individually magnaflux crack detected after heat treatment, they are then individually proof load tested to 2.5 times working load limit in accordance with EN1677. Only components fully compliant with all aspects of EN1677 can be used in chain slings certified to EN818-4. The William Hackett Grade 8 lifting components are suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

- Individually tested to resist 1000 Volts insulated with Test certificate
- Designed for protection of overhead crane during welding operations on suspended loads
- Design Factor 4 : 1 proof tested and certified

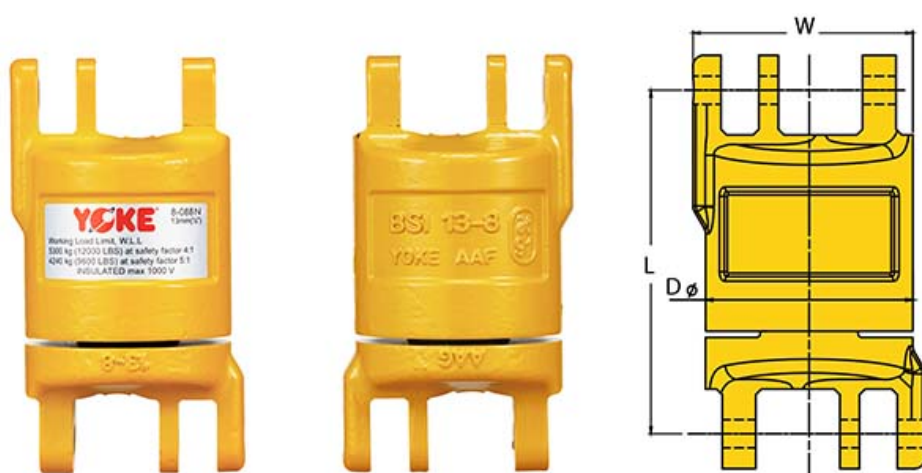

METRIC SPECIFICATIONS

| Part Code | WLL tonnes | Chain Size mm | L mm | D mm | W mm | Mass kg |
|-----------|------------|---------------|------|------|-------|---------|
| 8-088N-07 | 2.00 | 7, 8 | 50 | 48 | 50.0 | 0.6 |
| 8-088N-10 | 3.15 | 10 | 62 | 58 | 62.0 | 1.2 |
| 8-088N-13 | 5.30 | 13 | 72 | 74 | 78.5 | 2.4 |
| 8-088N-16 | 8.00 | 16 | 94 | 90 | 95.0 | 4.2 |
| 8-088N-20 | 12.50 | 18,20 | 109 | 105 | 110.0 | 6.7 |

IMPERIAL SPECIFICATIONS

| Part Code | WLL lbs | Chain Size inch | L inch | D inch | W inch | Mass lbs |
|-----------|---------|-----------------|--------|--------|--------|----------|
| 8-088N-07 | 4500 | 1/4 - 5/16 | 1.96 | 1.88 | 1.96 | 1.30 |
| 8-088N-10 | 7100 | 3/8 | 2.44 | 2.28 | 2.44 | 2.60 |