




Grade 8 Lifting Chain EN818-2

William Hackett Grade 8 short link lifting chain is fully compliant with EN818-2

The Grade 8 chain is embossed with manufacturer's mark and grade (MA8) and class leading batch code traceability. All sizes for the William Hackett Grade 8 are proof tested at manufacture to 2.5 times the given working load limit and have a range of diameters from 7mm - 32mm.

The Hackett Grade 8 chain is suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit, reductions apply up to 400°C.

Surface Finish: Black Painted.

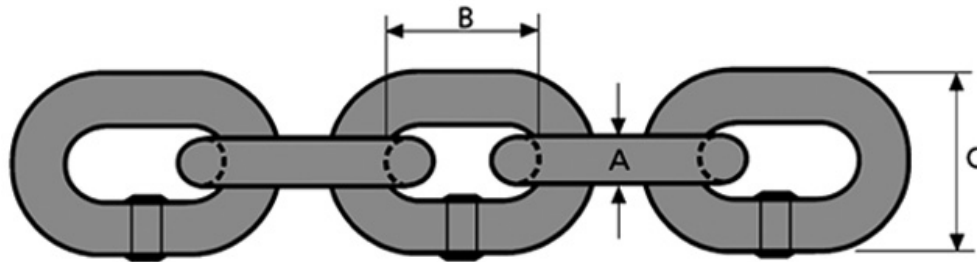

METRIC SPECIFICATIONS

Part code	Chain Size mm	A mm	B mm	C mm	WLL tonnes	Kgs per metre
AS1.070.5	7	7	21	25.9	1.50	1.10
AS1.080.5	8	8	24	29.6	2.00	1.50
AS1.100.5	10	10	30	37.0	3.15	2.20
AS1.130.5	13	13	39	48.1	5.30	3.80
AS1.160.5	16	16	48	59.2	8.00	5.80
AS1.200.5	20	20	60	74.0	12.50	9.10
AS1.220.5	22	22	66	81.4	15.00	11.00
AS1.260.5	26	26	78	96.2	21.20	15.30
AS1.320.5	32	32	96	118.0	31.50	23.20

IMPERIAL SPECIFICATIONS

Part code	Chain Size inch	A inch	B inch	C inch	WLL lbs	lbs per metre
AS1.070.5	1/4	0.27	0.83	1.02	3300	2.43
AS1.080.5	5/16	0.31	0.94	1.17	4410	3.30
AS1.100.5	3/8	0.39	1.18	1.46	6940	4.85
AS1.130.5	1/2	0.51	1.54	1.90	11680	8.38
AS1.160.5	5/8	0.63	1.89	2.33	17635	12.78
AS1.200.5	3/4	0.79	2.36	2.91	27555	20.06
AS1.220.5	7/8	0.87	2.60	3.20	33070	24.25
AS1.260.5	1	1.00	3.07	3.79	46740	33.73
AS1.320.5	1-1/14	1.25	3.78	4.65	69445	51.15

