




Grade 10 Short Link Chain

William Hackett Grade 10 short link lifting chain is fully compliant with ASTM973.

The Grade 10 chain is embossed with manufacturer's mark and grade (MA10) and class leading batch code traceability. All sizes for the William Hackett Grade 10 are proof tested at manufacture to 2.5 times the given working load limit and have a range of diameters from 6mm – 26mm.

The Hackett Grade 10 chain is suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

Surface Finish: Blue Painted.

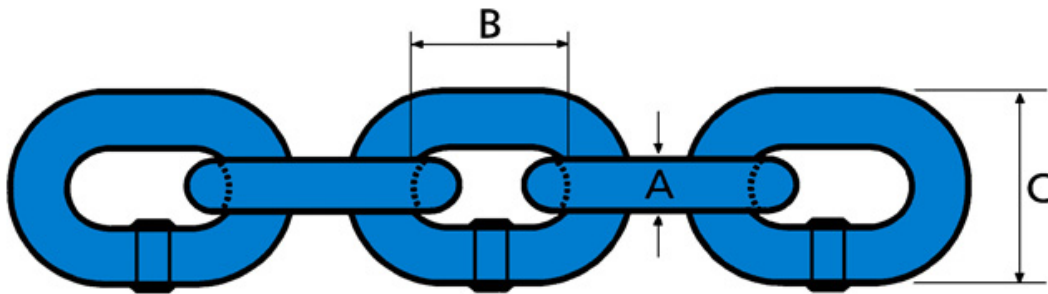

METRIC SPECIFICATIONS

Part Code	A mm	B mm	C mm	WLL tonnes	Kgs per metre	Mtr / Drum
ASV.060.5	6	18	22.0	1.4	0.8	500
ASV.080.5	8	24	29.6	2.5	1.5	350
ASV.100.5	10	30	37.0	4.0	2.2	250
ASV.130.5	13	39	48.1	6.7	3.8	150
ASV.160.5	16	48	59.2	10.0	5.8	100
ASV.200.5	20	60	74.0	16.0	9.1	60
ASV.220.5	22	66	81.4	19.0	11.00	50
ASV.260.5	26	78	96.2	26.5	15.3	25

IMPERIAL SPECIFICATIONS

Part Code	A inch	B inch	C inch	WLL lbs	lbs per metre	Mtr / Drum
ASV.060.5	0.24	0.70	0.87	3000	1.76	500
ASV.080.5	0.31	0.94	1.16	5500	3.30	350
ASV.100.5	0.39	1.18	1.45	8800	4.85	250
ASV.130.5	0.51	1.54	1.90	14700	8.37	150
ASV.160.5	0.63	1.89	2.33	22000	12.78	100
ASV.200.5	0.78	2.36	2.91	35200	20.06	60
ASV.220.5	0.86	2.59	3.20	41800	24.25	50
ASV.260.5	1.02	3.07	3.78	58400	33.73	25

