


**Designation :** Fall Arrester on Polyamide Twisted Rope

- Works on the anchor line *KRATOS SAFETY* in polyamide twisted rope, diametre 14-16 mm.
- Simple opening / closing and automatic locking by a double security system.
- Has a manual locking position to allow work on inclined roof. (A)
- Has a unique non-inverting system to prevent from installing the device upside down on the anchor line. (B)
- Minimum breaking strength > 15 kN.

**Connector :**

1 steel screw-locking karabiner opening 17 mm, ref. FA 50 101 17 for connection on a harness.

**Compliance :** Conforms to EN 353-2 : 2002.

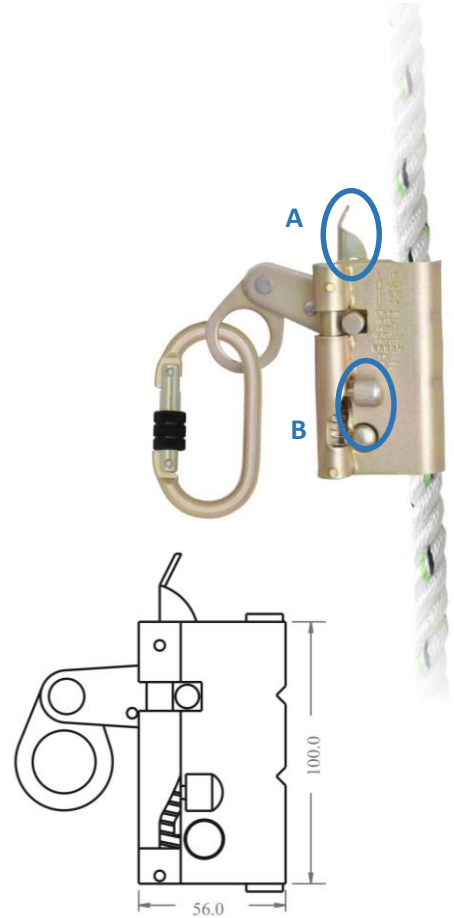

**Material of the components :**

Rope Grab : Steel  
Connector : Steel.

HS code	Carton Size / Pieces	Unit weight
83081010	40x40x24 / 20	1,05 kg

**AET : N° 2664 Issue 3 Extension 3**

Satra Technology Centre, N°0321  
Wyndham Way, Telford Way, Kettering,  
Northamptonshire, NN16 8SD, United Kingdom.

**Article 11: GB07/73551**

SGS United Kingdom Ltd., N° 0120  
Unit 202B, Worle Parkway,  
Weston-super-Mare, BS22 6WA, United Kingdom



**ZI les portes du Dauphiné**  
**4 rue de l'Aigue**  
**69 780 St Pierre de Chandieu – France**  
**Tel : +33 (0)4 72 48 78 27 Fax : + 33 (0)4 72 48 58 32**  
**www.kratossafety.com info@kratossafety.com**

