




## TECHNICAL SHEET FA 20 400 03

### Olympe-S cable, retractable fall arrester 3.5 m



# Olympe-S

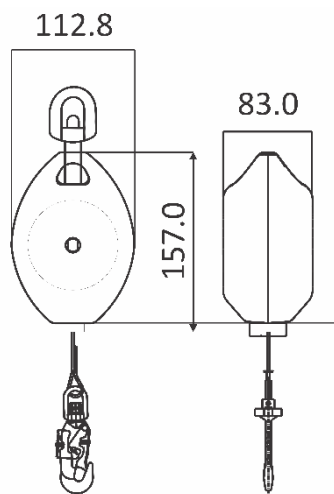

- Casing made up of high impact strength Polymer, to prevent breakage.
- Comes with Galvanized Steel Wire Rope of diam. 4.5 mm with a snout for a better gripping of the retractable lanyard.
- Internal braking mechanism to reduce the fall arrest force to less than 6 kN.
- Comes with an external inbuilt energy absorber.
- Swivel at anchorage end and attachment end.

**Minimum breaking strength > 12 kN.**

**Connectors:** Steel screw-locking karabiner FA 50 101 17, opening 18 mm, at anchorage end, and steel snap-hook FA 50 203 20, opening 20 mm, with load indicator at attachment end.

**Compliance:** EN360:2002.

Tested and approved for horizontal use (work near sharp edges) according to VG 11.060 (Rev. 08 - 10/2014).

#### Material of components:

Protective casing: PA 6 30% fiberglass  
 Wire rope: Galvanized steel  
 Connectors: Steel  
 Snout: Rubber

Length :	<b>CE</b>	Weight :
3.5 m		2.55 kg

**KRATOS SAFETY**  
 689 Chemin du Buclay  
 38540 HEYRIEUX – FRANCE

Tel : +33 (0)4 72 48 78 27  
 Fax : +33 (0)4 72 48 58 32

[www.kratossafety.com](http://www.kratossafety.com) / [info@kratossafety.com](mailto:info@kratossafety.com)

<b>HS CODE</b>
8428 90 90
<b>CARTON SIZE / PIECES</b>
80 x 40 x 24 cm / 6
<b>AET N° 8088 Issue 3 Extension 2</b>
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
<b>ARTICLE 11 GB07/73551</b>
SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom