




TECHNICAL SHEET FA 20 402 10B

Helixon wire rope, retractable fall arrester 10 m

Helixon



140
kg

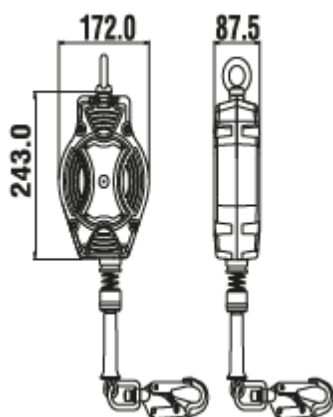

- Robust & durable polymer casing, equipped with:
 - ✓ a carrying handle,
 - ✓ a wire rope-cleaning brush,
 - ✓ a window, that can be easily removed for reaching the internal mechanism, in order to inspect it without totally opening the casing.
- Galvanized steel wire rope of diam. 4.5 mm, having:
 - ✓ a connector ref. FA 50 203 20 with load indicator,
 - ✓ a gripping handle.
- Internal braking mechanism to reduce the fall arrest force to less than 6 kN.
- Swivel and FA 50 101 17 connector at anchorage end.

Delivered with a cord for guiding the winding back of the wire rope.

- Resistance > 12 kN.

Compliance: EN 360:2002, ATEX ( II2 G Exh IIC T6 Gb).

Material of components:

Protective casing: PA 6 30% fiberglass
Wire rope: Galvanized steel
Connectors: Steel
Snout: Rubber

Length:	CE	Weight:
10 m		4.27 kg

KRATOS SAFETY

689 Chemin du Buclay
38540 Heyrieux – FRANCE

Tel : +33 (0)4 72 48 78 27

Fax : +33 (0)4 72 48 58 32

www.kratossafety.com / info@kratossafety.com

HS CODE

8428 90 90

CARTON SIZE / PCS.

60 x 40 x 24 cm / 4

AET N°3541 I14 E4

Satra Technology Centre, N°0321

Wyndham Way, Telford Way, Kettering
Northamptonshire, NN16 8SD, United Kingdom

ARTICLE 11 GB07/73551

SGS United Kingdom Ltd., N°0120

Unit 202B, Worle Parkway,
Weston-super-Mare, BS22 6WA, United Kingdom

ACKNOWLEDGEMENT OF RECEIPT N°3975/1/2018 (ATEX)

Technická Inšpekcia, a.s. N°1354

Trnavská cesta 56, 821 01 Bratislava, Slovenská Republika