










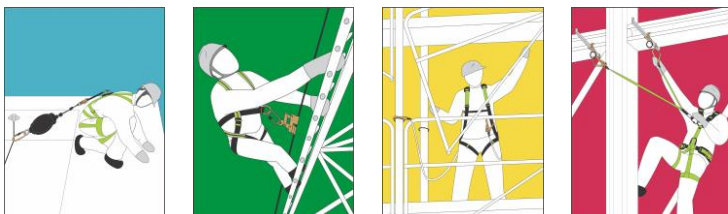

# FA 30 620 15, FA 30 621 15



<b>HS CODE</b>
56090090
<b>CARTON SIZE / PCS.</b>
FA 30 620 15: 80 x 40 x 24 cm / 10 FA 30 621 15: 60 x 40 x 48 cm / 8
<b>AET N° 2777/10964-01/E06-01</b>
<b>Satra Technology Europe Ltd., N° 2777,</b> Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
<b>MODULE D FI14/14003.02</b>
<b>SGS Fimko Oy, N°0598</b> Takomotie 8, 00380 HELSINKI, Finland



REF.	FA 30 620 15	FA 30 621 15
LG.	1.50 m (connectors included)	
 KG	Max. 140 KG	
CE	EN 355:2002	
MAT.	 PA 11 mm Polyamide	
	45 mm	
	 FA 50 103 22B (20 mm) / FA 50 208 60 (60 mm)	 FA 50 103 22B (20 mm) / FA 50 208 11 (109 mm)
	NO	
+	VG 11.063	
 Kg	1.79 KG	2.60 KG



**Largeur de l'absorbeur d'énergie**  
Width of the energy absorber  
**Ancho del absorbedor de energía**  
Larghezza del assorbitore di energia  
**Breite des Falldämpfers**

LG.



**Longueur Poids maxi utilisateur**  
**Length** Max. user weight  
**Longitud** Peso máximo del usuario  
**Lunghezza** Peso Max. dell'utente  
**Länge** Höchstgewicht des Benutzers



**Matière connecteurs**  
Material of connectors  
**Material de los conectores**  
Materiale connettori  
**Material der Verbinder**



**Homologué pour le travail à proximité d'arêtes vives**  
Approved for work near sharp edges  
**Homologado para trabajo cerca de aristas vivas**  
Omologato per lavoro in prossimità di spigoli vivi  
**Zugelassen für Arbeiten in der Nähe scharfer Kanten**