



TECHNICAL SHEET


FA 40 300 15

Designation :

Restraint Webbing Lanyard

- Made up of 30mm wide polyester webbing.
- Loops protected by an abrasion resistant tubular webbing
- Breaking strength : 22 kN

Compliance : EN354 : 2002

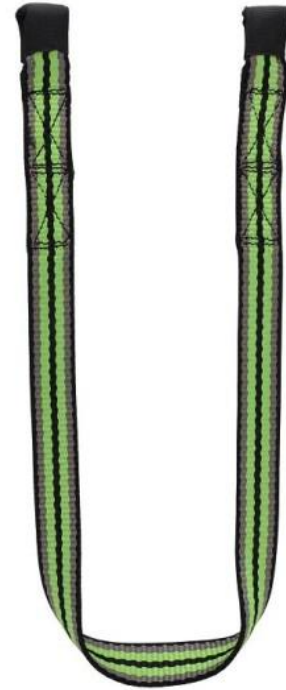

Length :

Lg : 1.5 mtr

Material:

Webbing: polyester

HS code

56090090

Carton Size/ Pieces

60x40x24 / 50

Unit Weight

0,18 kg

AET: N° 4305 Issue 1 Extension 4

Satra Technology Centre, N°0321
Wyndham Way, Telford Way, Kettering,
Northamptonshire, NN16 8SD, United Kingdom.

Article 11: GB07/73551

SGS United Kingdom Ltd., N° 0120
Unit 202B, Worle Parkway,
Weston-super-Mare, BS22 6WA, United Kingdom



Maj. : 10/13

ZI les portes du Dauphiné

4 rue de l'Aigüe

69 780 St Pierre de Chandieu – France

Tel : +33 (0)4 72 48 78 27 Fax : + 33 (0)4 72 48 58 32

www.kratossafety.com info@kratossafety.com

