

Fig. 1


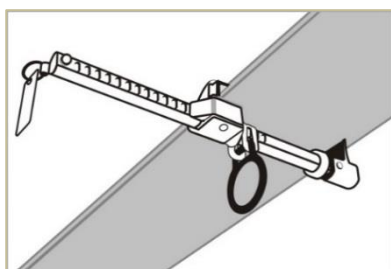


Fig. 2

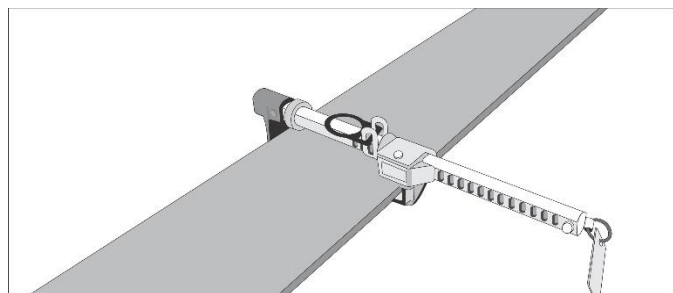

Length :	CE	Weight:
100 to 300 mm		1.85 kg

KRATOS SAFETY

689 Chemin du Buclay
38540 Heyrieux (France)

Tel. : +33 (0)4 72 48 78 27

Fax. : +33 (0)4 72 48 58 32

www.kratossafety.com / info@kratossafety.com

Beam Anchor

Attachment on steel D-Ring (inside diameter: 55 mm).

Dimensions: Designed to be installed on beams whose width is between 100 mm and 330 mm.

	Dimensions
a	Diam. 25 mm
b	32 mm
c	19 mm
d	35 mm
e	49 mm
f	98 mm

Minimum breaking strength: > 23 kN

Compliance: EN795:2012 Type B.

Fig. 1 - Standard use:

Anchoring at the underside of the metal beam.

Fig. 2 - Possible use:

Anchoring on top of the metal beam.

Materials:

Aluminium, brass and steel.

HS CODE
83081010
CARTON SIZE / PIECES
60 x 40 x 24 cm / 10
AET N°5744 I2 E1
Satra Technology Centre, N°0321 Wyndham Way, Telford Way, Kettering Northamptonshire, NN16 8SD, United Kingdom
ARTICLE 11 GB07/73551
SGS United Kingdom Ltd., N°0120 Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom