



# TECHNICAL SHEET


FA 60 013 00

**Designation :** Concret anchor strap

- Disposable webbing, designed to be installed on steel frame concrete.
- Polyester webbing 45mm and forged galvanized D-ring

**Minimum breking strength :** 15 kN

**Compliance :** EN 795 :1996 - classe B

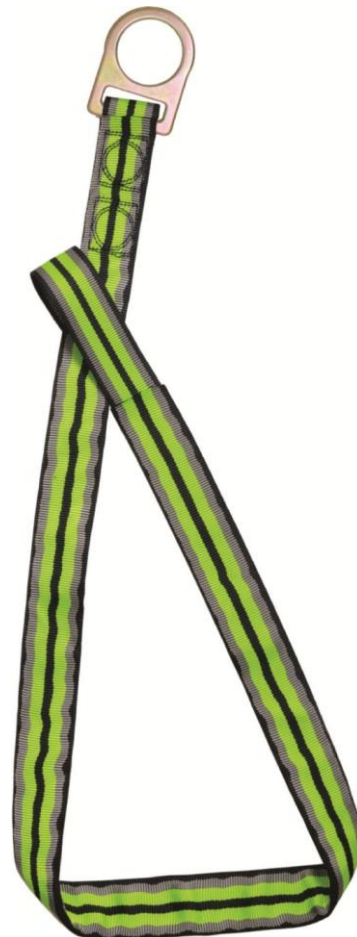

**Length :**

Length : 1m

**Materials of components**

Anchor : polyester

D-ring : Alloy steel

**HS code**

56090000

**Carton size / pieces**

60x40x24 / 50

**Unit Weight**

0.35 Kg

**AET: N° Issue Extension**

Satra Technology Centre, N°0321  
Wyndham Way, Telford Way, Kettering,  
Northamptonshire, NN16 8SD, United Kingdom.

**Article 11: GB07/73551**

SGS United Kingdom Ltd., N° 0120  
Unit 202B, Worle Parkway,  
Weston-super-Mare, BS22 6WA, United Kingdom



Maj. : 12/12

ZI les portes du Dauphiné

4 rue de l'Aigüe

69 780 St Pierre de Chandieu – France

Tel : +33 (0)4 72 48 78 27 Fax : + 33 (0)4 72 48 58 32

www.kratossafety.com info@kratossafety.com

