




## TECHNICAL SHEET FA 70 009 99

KERNMANTLE SEMI-STATIC ROPE, DIAM. 9.6 MM, FOR RES-Q & LIFT RES-Q

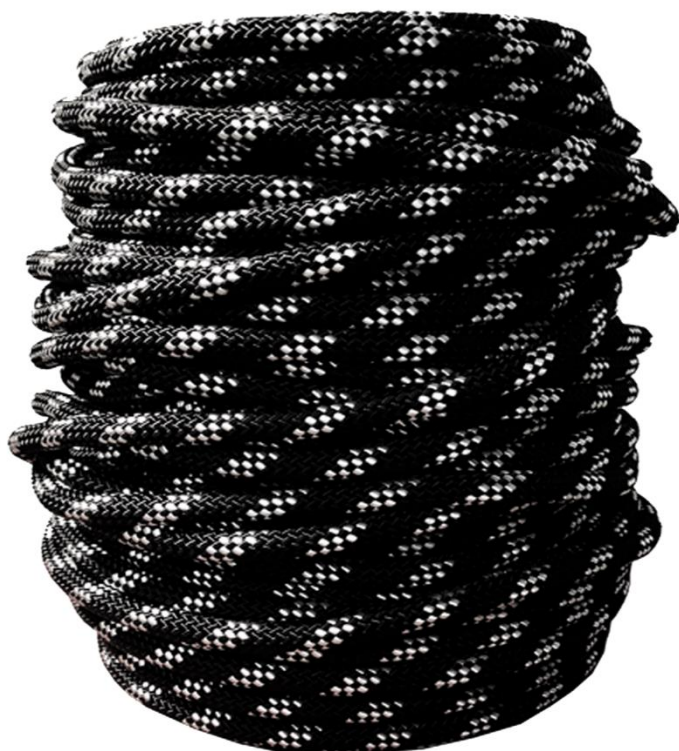

Metre of Kernmantle semi-static rope, diam. 9.6 mm


- Kernmantle polyamide rope diam. 9.6 mm.
- Colored tracer strands that allow noting visually the wear of the rope.
- To associate with the following references:
  - FA 70 009 98 (Kit of rope ends for ropes with special length, supplied with 2 loops and 2 snap hooks) and
  - FA 70 101 01 (Res-Q) or FA 70 201 00 (Lift Res-Q).

### **Compliance:**

- EN 341:2011 Class B (used in combination with FA 70 101 00)
- EN 341:2011 Class A + EN 1496 :2007 Class B (used in combination with FA 70 201 00).

### **Material:**

Polyamide

<b>Length:</b>		<b>Weight/m:</b>
1 m – Available from 1 m to 200 m		0.08 kg/m

### **KRATOS SAFETY**

689 Chemin du Buclay  
38540 Heyrieux – FRANCE

Tel : +33 (0)4 72 48 78 27

Fax : +33 (0)4 72 48 58 32

[www.kratossafety.com](http://www.kratossafety.com) / [info@kratossafety.com](mailto:info@kratossafety.com)

<b>HS CODE</b>
5607 50 11
<b>CARTON SIZE / PCS.</b>
40 x 40 x 24 cm / 1 roll of 200 m
<b>AET N°2015-4469 / EMZ &amp; AET N°2013-3938 / EMZ</b>
<b>AUVA-STP N°0511</b> Adalbert-Stifter Straße 65 1200 Vienna, Austria
<b>Module C2, 2016/425 UE Regulation</b>
<b>AUVA-STP N°0511</b> Adalbert-Stifter Straße 65 1200 Vienna, Austria