


G500 Standard equipment


- ✓ Single-phase 230V/50Hz or single-phase 110V/50Hz electric motor
- ✓ IP67 plug
- ✓ Frame with 4 steel wheels
- ✓ Upper limit safety device
- ✓ Controls on single-phase version: direct with 3-pushbutton 1.5-m pendant control
- ✓ Positioning brake
- ✓ Self-braking motor with magnetic device

Applications

Thanks to its sturdy structure and powerful motor, it is particularly suitable for heavy duty use on site.

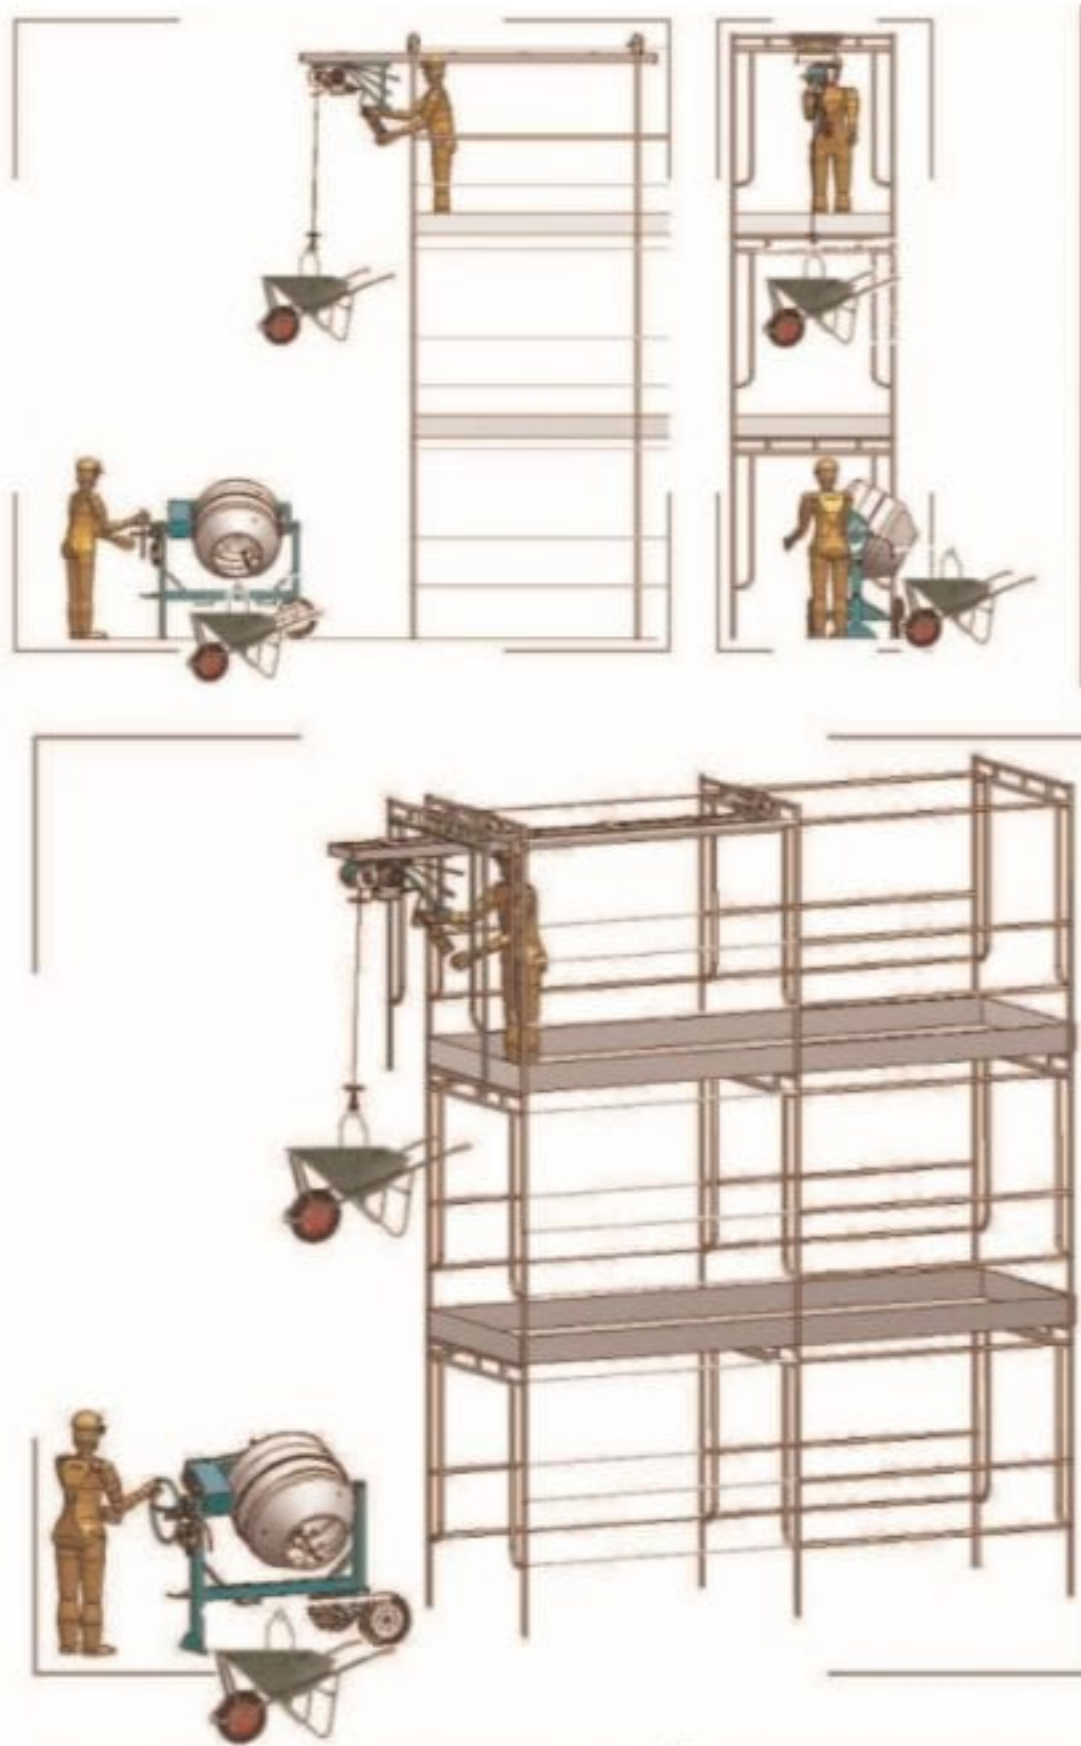

ELECTRIC MOTOR
SINGLE-PHASE

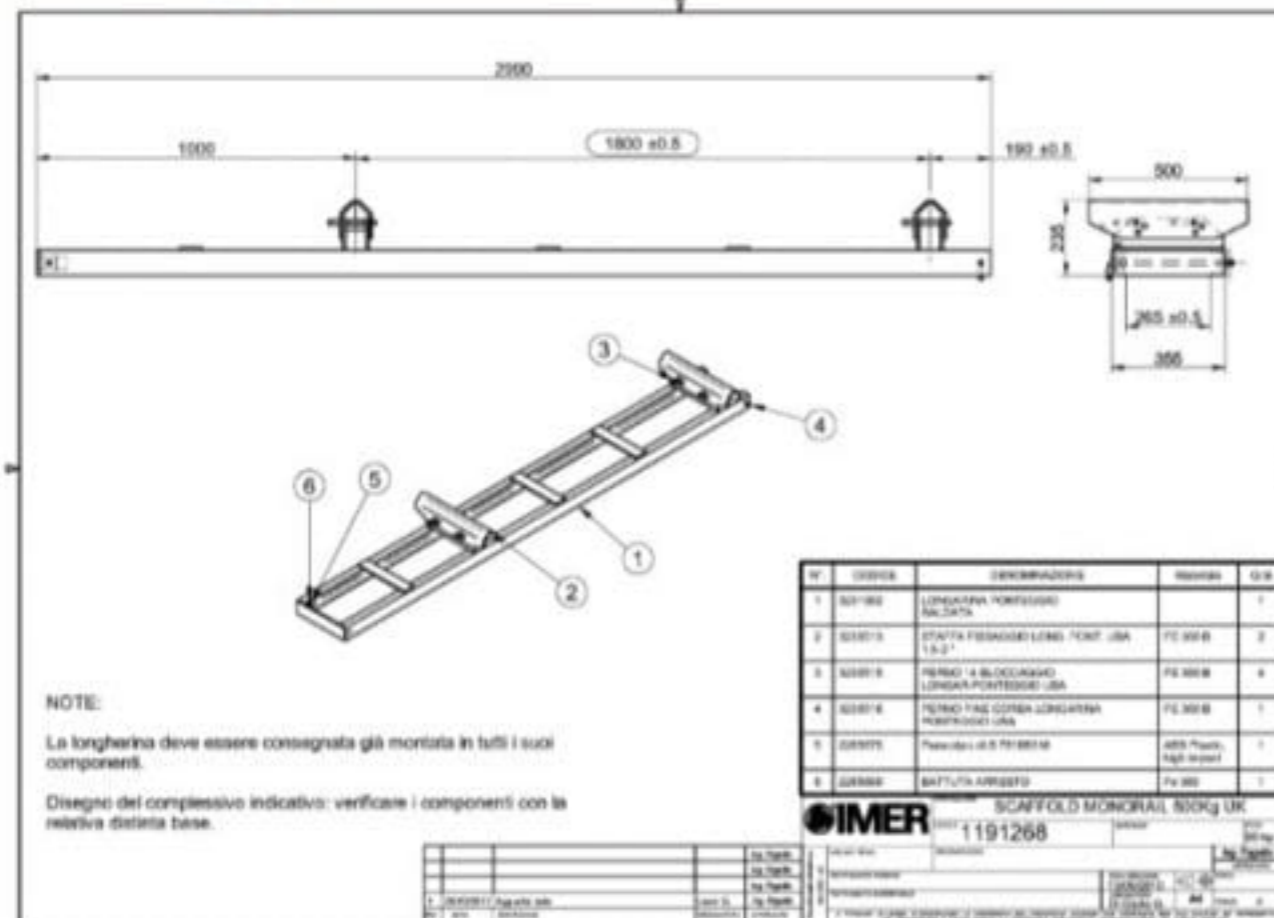

110V/50HZ	230V/50HZ
MOTOR AVAILABLE	
✓ G 500	

		G500
Max capacity	kg	500
Av. full load lifting speed	m/min	17
Max working height	m	42
Ø wire rope	mm	6
Rope length	m	43
Motor power rate	kW	1.5 (110V50Hz)
Motor speed	rpm	1320
Running current	A	23
Machine weight	kg	50
SPL in operator's position	dB(A)	<72
Dimensions w/l/h	mm	382/800/410
Packing Dimensions w/l/h	mm	400/820/440