




## GT Blue Pin Bow Shackles with Screw Collar Pin – BPSCB

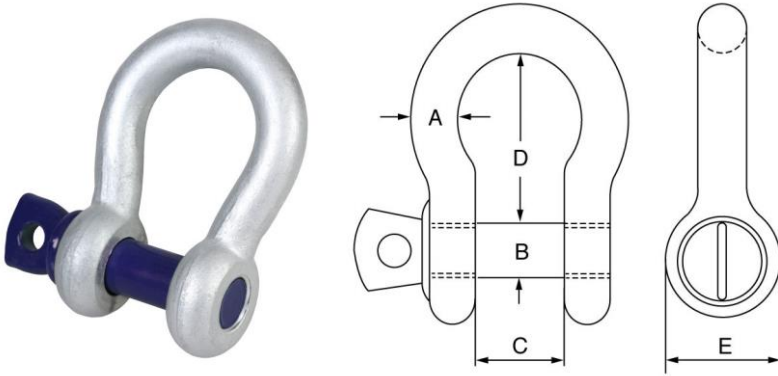

- Grade 6 high tensile steel body and pin, quenched and tempered.
- Hot dipped galvanised finish.
- Meets the W.L.L. requirements of EN 13889 (from 0.5t to 25t) and US Fed. Spec RR-C 271.
- Temperature range 0°C up to +200°C.
- Minimum breaking load is 6 times the W.L.L.
- Marked with CE, W.L.L, manufacturers ID, size and traceability code.
- Certification available **2.1** **3.1** **DoC**

3.1\* May have an additional cost and be subject to request before production of item.

Product Code	W.L.L. t	A mm	B mm	C mm	D mm	E mm	Weight kgs
BPSCB.33	0.33	5	6	9.5	22	16	0.02
BPSCB.5	0.5	6.4	8	12	28.6	20	0.06
BPSCB.75	0.75	8	10	13	31	21	0.11
BPSCB1	1	9.5	11	17	36.5	26	0.15
BPSCB1.5	1.5	11	12	18	42.5	29	0.21
BPSCB2	2	12.7	16	20.6	47.3	32	0.37
BPSCB3.25	3.25	16	19.8	27	60.5	43	0.65
BPSCB4.75	4.75	19	22	32	71.5	51	1.04
BPSCB6.5	6.5	21.7	27	36.6	84	58	1.56
BPSCB8.5	8.5	25.4	30	43	96	68	2.32
BPSCB9.5	9.5	28.5	33	46	108	75	3.28
BPSCB12	12	31.5	36	51.6	119	83	4.51
BPSCB13.5	13.5	34.9	39	57	133.5	92	5.93
BPSCB17	17	38	42	60	147	99	7.89
BPSCB25	25	44	52	73	178	126	13.4
BPSCB35	35	50	56	82	197	138	18.85
BPSCB55	55	63.5	68	105	267.5	180	37.86

\* Product Image is representation only and may not reflect product accurately.