




## GT Blue Pin Bow Shackle with Safety Nut and Bolt Pin – BPSAB

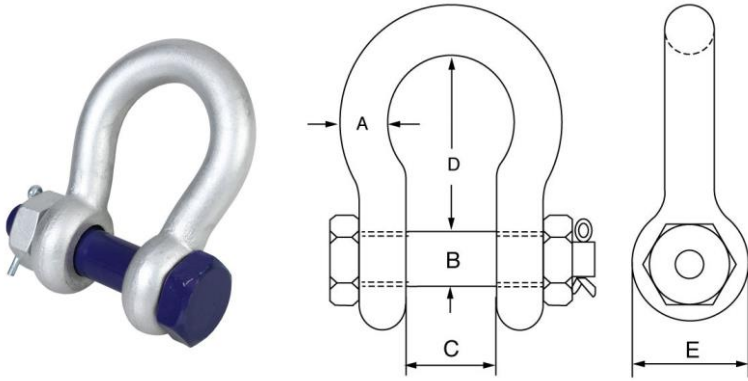

- Grade 6 high tensile steel body and pin, quenched and tempered.
- Hot dipped galvanised finish.
- Meets the W.L.L. requirements of EN 13889 (from 0.5t to 25t) and US Fed. Spec RR-C 271.
- Temperature range 0°C up to +200°C.
- Minimum breaking load is 6 times the W.L.L. up to 85t, and 5 times the W.L.L. above 85t.
- Marked with CE, W.L.L, manufacturers ID, size and traceability code.
- Certification available **2.1** **3.1** **DoC**

Product Code	W.L.L. t	A mm	B mm	C mm	D mm	E mm	Weight kgs
BPSAB.5	0.5	6.4	8	12	28.6	20	0.07
BPSAB.75	0.75	8	10	13	31	21	0.13
BPSAB1	1	9.5	12	17	36.5	26	0.17
BPSAB1.5	1.5	11	12	18	42.5	29	0.25
BPSAB2	2	12.7	16	20.6	47.3	32	0.44

Product Code	W.L.L.	A	B	C	D	E	Weight
	t	mm	mm	mm	mm	mm	kgs
BPSAB3.25	3.25	16	19.8	27	60.5	43	0.79
BPSAB4.75	4.75	19	22	32	71.5	51	1.26
BPSAB6.5	6.5	22	27	36.6	84	58	1.88
BPSAB8.5	8.5	25	30	43	96	68	2.78
BPSAB9.5	9.5	28.5	33	46	108	75	3.87
BPSAB12	12	31.8	36	51.6	119	83	5.26
BPSAB13.5	13.5	34.9	39	57	133.5	92	6.94
BPSAB17	17	38	42	60	147	99	8.79
BPSAB25	25	44	52	73	178	126	14.99
BPSAB35	35	50	56	82	197	138	20.65
BPSAB55	55	63.5	68	105	267	180	41.05
BPSAB85	85	75	85	127	320	190	62
BPSAB120	120	88	95	133	372	240	106