


GT Blue Pin Dee Shackle with Screw Collar Pin – BPSCD

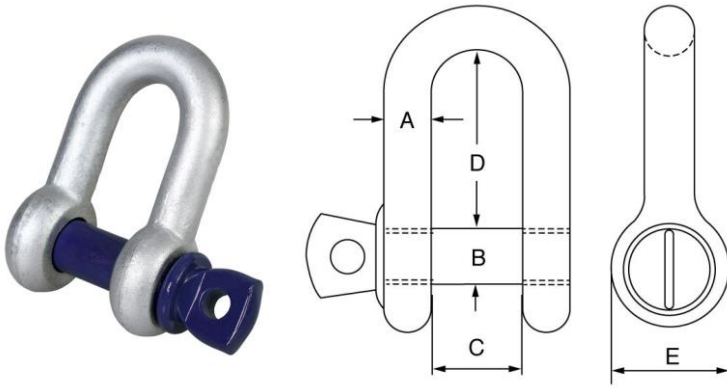

- Grade 6 high tensile steel body and pin, quenched and tempered.
- Hot dipped galvanised finish.
- Meets the W.L.L. requirements of EN 13889 (from 0.5t to 25t) and US Fed. Spec RR-C 271.
- Temperature range 0°C up to +200°C.
- Minimum breaking load is 6 times the W.L.L.
- Marked with CE, W.L.L, manufacturers ID, size and traceability code.
- Certification available **2.1** **3.1** **DoC**

Product Code	W.L.L. t	A mm	B mm	C mm	D mm	E mm	Weight kgs
BPSCD.5	0.5	6.4	8	12	22	20	0.06
BPSCD.75	0.75	8	10	13	26	21	0.11
BPSCD1	1	9.5	11	17	32	26	0.15
BPSCD1.5	1.5	11	12	18	36.5	29	0.21
BPSCD2	2	12.7	16	20.6	41.3	32	0.37

Product Code	W.L.L. t	A mm	B mm	C mm	D mm	E mm	Weight kgs
BPSCD3.25	3.25	16	19.8	27	51	43	0.65
BPSCD4.75	4.75	19	22	32	62	51	1.04
BPSCD6.5	6.5	21.7	27	36.6	74.8	58	1.56
BPSCD8.5	8.5	25.4	30	43	81	68	2.32
BPSCD9.5	9.5	28.5	33	46	90	75	3.28
BPSCD12	12	31.5	36	51.6	100.8	83	4.51
BPSCD13.5	13.5	34.9	39	57	112.5	92	5.93
BPSCD17	17	38	42	60	125	99	7.89
BPSCD25	25	44	52	73	146.5	126	13.4
BPSCD35	35	50	56	82	171	138	18.85
BPSCD55	55	63.5	68	105	203	180	37.86

* Product Image is representation only and may not reflect product accurately.