


Grade 8 Clevis Sling Hook c/w Safety Catch – G8CSH

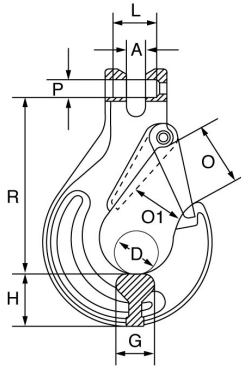

KITO
weissenfels

- Alloy steel, quenched and tempered.
- Red painted finish.
- Conforms to BS EN 1677-2.
- Temperature range: -40 °C to +400 °C (Reductions in W.L.L apply).
- Clevis fitting enables direct connection to chain.
- Certification available **2.1** **3.1** **DoC**

Product Code	Chain Dia mm	Part No	A mm	D mm	G mm	H mm	O mm	O1 mm	R mm	P x L mm
G8CSH6	6	WA79S	7	18	16.5	20	25	19	69	7.4 x 16.5
G8CSH8	7/8	WA80S	9	25	19	28	32	26	94.5	9.6 x 23
G8CSH10	10	WA81S	11.5	30	25	33	39	31	109	12.5 x 29.5
G8CSH13	13	WA82S	14.5	38	30	40	48	39	135	16 x 37
G8CSH16	16	WA83S	17.5	44	37	47	55	45	155	20 x 52
G8CSH20	20	WA84S	23	52	51	52	61	53	183	24 x 73

Product Code	Chain Dia	Part No	A	D	G	H	O	O1	R	P x L
	mm		mm	mm	mm	mm	mm	mm	mm	mm
G8CSH22	22	WA85S	24.5	60	50	62	71	61	212	27 x 71

Technical Data

Chain Dia	W.L.L.	M.P.F.	M.B.F.	Weight
mm	t	kN	kN	kgs
6	1.12	28.3	45.2	0.27
7/8	2	50.3	80.4	0.53
10	3.15	78.5	126	0.95
13	5.3	133	212	1.67
16	8	201	322	3
20	12.5	248	496	5.4
22	15	298	596	7