


Grade 8 Lashing Components - BS EN 12195-3

Grade 8 Clevis Grab Hook


Conforms to BS EN 12195-3.
 Suitable for use with Grade 8 chains.
 Clevis fitting enables direct connection to the chain.
 For use with Grade 8 chain and loadbinders. Supplied with safety pin locking device to enhance operational safety

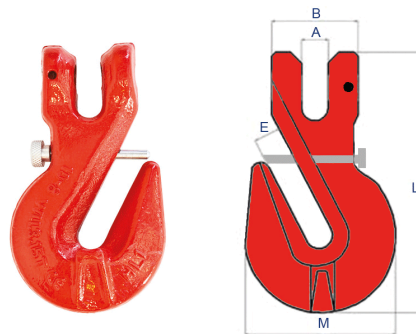

Part Code	Chain Size (mm)	Lashing Capacity (kN)	A (mm)	B (mm)	E (mm)	L (mm)	M (mm)	Mass (Kg)
MB8.080.GH	8	40	9.5	35.0	11.0	89.0	49.5	0.33
MB8.100.GH	10	63	12.5	42.5	13.2	126.5	70.5	0.88
MB8.130.GH	13	100	15.0	53.0	16.5	163.5	90.0	1.85
MB8.160.GH	16	160	19.5	65.5	19.2	183.5	112.5	3.24

Grade 8 Clevis Sling Hook


Conforms to BS EN 12195-3.
 Suitable for use with Grade 8 chains.
 Clevis fitting enables direct connection to chain.
 For use with Grade 8 chain and loadbinders.

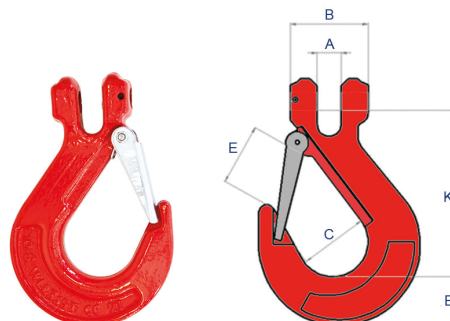

Part Code	Chain Size (mm)	Lashing Capacity (kN)	A (mm)	B (mm)	C (mm)	E (mm)	H (mm)	K (mm)	Mass (Kg)
MB8.080.SH	8	40	9.5	37.0	37.0	29.0	32.5	85.5	0.52
MB8.100.SH	10	63	13.0	49.0	46.0	39.0	35.0	104.0	1.05
MB8.130.SH	13	100	16.5	56.5	56.0	47.0	42.5	128.0	2.00
MB8.160.SH	16	160	21.5	70.5	60.0	55.0	54.0	150.0	3.70


Grade 8 Component Connector

The William Hackett Grade 8 forged lifting components are manufactured by YOKE from alloy steel in accordance with EN1677. All forged components are individually magnaflux crack detected after heat treatment, they are then individually proof load tested to 2.5 times working load limit in accordance with EN1677. Only components fully compliant with all aspects of EN1677 can be used in chain slings certified to EN818-4. The William Hackett Grade 8 lifting components are suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

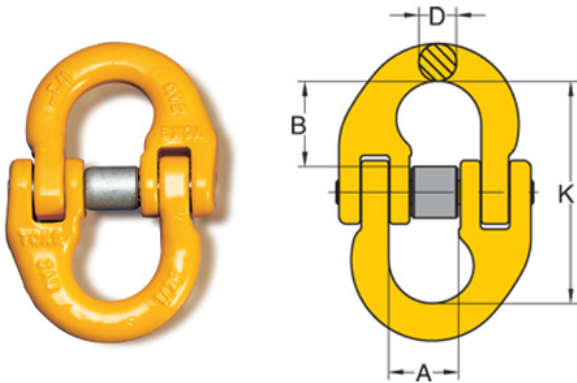

Part Code	Chain Size (mm)	Lashing Capacity (kN)	A (mm)	B (mm)	D (mm)	K (mm)	Mass (Kg)
8-015-07	8	40	18	22	9	57	0.2
8-015-10	10	63	25	26	11	68	0.3
8-015-13	13	100	30	35	16	91	0.7
8-015-16	16	160	36	38	19	100	1.1
8-015-20	20	245	42	46	22	122	1.7
8-015-22	22	294	49	59	24	152	3.0
8-015-26	26	415	55	62	30	162	4.6
8-015-32	32	618	69	79	36	202	8.6

Grade 8 Weld on lifting point

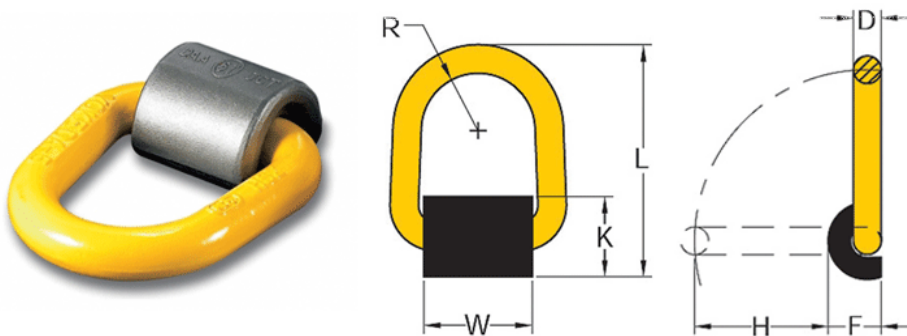

Part Code	W.L.L. (t)	Lashing Capacity (kN)	D (mm)	F (mm)	H (mm)	K (mm)	L (mm)	R (mm)	W (mm)	Mass (Kg)
8-057-1T	1.0	20	14.2	27	55	38	105	24	50	0.5
8-057-3T	3.0	60	17.2	34	60	48	112	29	58	0.9
8-057-5T	5.0	98	22.5	43	74	61	154	33	64	1.8

The Mount
566 Eutruria Road
Newcastle under Lyme
ST5 0SU