


Grade 8 Lifting Chain EN818-2

William Hackett Grade 8 short link lifting chain is fully compliant with EN818-2

The Grade 8 chain is embossed with manufacturer's mark and grade (MA8) and class leading batch code traceability. All sizes for the William Hackett Grade 8 are proof tested at manufacture to 2.5 times the given working load limit and have a range of diameters from 7mm - 32mm. The Hackett Grade 8 chain is suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit, reductions apply up to 400°C.

Surface Finish: Black Painted.

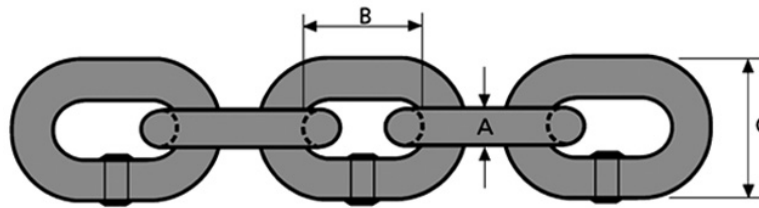

METRIC SPECIFICATIONS

Part code	A mm (Nominal)	B mm	C mm	WLL tonnes	kgs per metre	Metres per drum
AS1.070.5	7	21	25.9	1.50	1.10	500
AS1.080.5	8	24	29.6	2.00	1.50	350
AS1.100.5	10	30	37.0	3.15	2.20	250
AS1.130.5	13	39	48.1	5.30	3.80	150
AS1.160.5	16	48	59.2	8.00	5.80	100
AS1.200.5	20	60	74.0	12.50	9.10	60
AS1.220.5	22	66	81.4	15.00	11.00	50
AS1.260.5	26	78	96.2	21.20	15.30	30
AS1.320.5	32	96	118.0	31.50	23.20	25

IMPERIAL SPECIFICATIONS

Part code	A inch (Nominal)	B inch	C inch	WLL lbs	lbs per ft	ft per drum
AS1.070.5	0.27	0.83	1.02	3300	0.74	1640
AS1.080.5	0.31	0.94	1.17	4410	1.00	1148
AS1.100.5	0.39	1.18	1.46	6940	1.48	820
AS1.130.5	0.51	1.54	1.90	11680	2.55	492
AS1.160.5	0.63	1.89	2.33	17635	3.89	328
AS1.200.5	0.79	2.36	2.91	27555	6.11	196
AS1.220.5	0.87	2.60	3.20	33070	7.39	164
AS1.260.5	1.00	3.07	3.79	46740	10.28	98
AS1.320.5	1.25	3.78	4.65	69445	15.59	82

The Mount
 566 Eutruria Road
 Newcastle under Lyme
 ST5 0SU