




Green Pin Super® Bow Shackle with Safety Nut and Bolt Pin – GPSUP

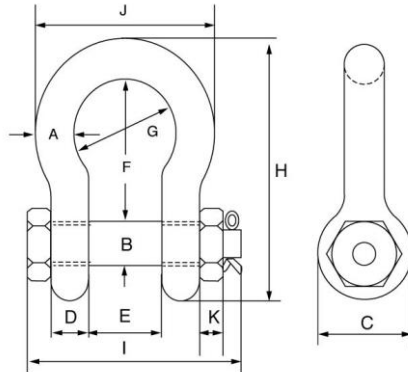

- Grade 8 alloy steel body and pin, quenched and tempered.
- Hot dipped galvanised finish, 175t is painted.
- Conforms to ASME B30.26 and meets the W.L.L. performance requirements of US Fed. Spec. RR-C-271 Type IVA Class 3, grade b.
- Minimum breaking load is 5 times the W.L.L.
- Temperature range -20°C up to +200°C.
- 150 & 175 tonne with round headed bolt.
- Full CAD support available upon request.
- Certification available **2.1** **3.1** **MTC** **DoC** **LROS**

Product Code	W.L.L.t	mmA	mmB	mmC	mmD	mmE	mmF	mmG	mmH	mmI	mmJ	mmK	Weightkgs	Technical Specification
--------------	---------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----------	-------------------------

G-5263

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	J	K	Weight	Technical Specification
--------------	--------	---	---	---	---	---	---	---	---	---	---	---	--------	-------------------------

	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs	
GPSUP3.3	3.3	13.5	16	34	13	22	51	32	89	82	58	13	0.4	Download
GPSUP5	5	16	19	40	16	27	64	43	110	98	75	17	0.73	Download
GPSUP7	7	19	22	46	19	31	76	51	129	114	89	19	1.19	Download
GPSUP9.5	9.5	22	25	52	22	36	83	58	144	130	102	22	1.73	Download
GPSUP12.5	12.5	25	28	59	25	43	95	68	164	150	118	25	2.56	Download
GPSUP15	15	28	32	66	28	47	108	75	185	166	131	27	3.6	Download
GPSUP18	18	32	35	72	32	51	115	83	201	178	147	30	4.95	Download
GPSUP21	21	35	38	80	35	57	133	92	227	197	162	33	6.62	Download
GPSUP30	30	38	42	88	38	60	146	99	249	217	175	34	8.11	Download
GPSUP40	40	45	50	103	45	74	178	126	300	260	216	40	15	Download
GPSUP55	55	57	57	117	57	83	197	138	341	303	252	46	23	Download
GPSUP85	85	70	70	143	70	105	260	180	437	363	320	56	44	Download
GPSUP120	120	83	83	162	83	127	329	190	535	425	356	66	72	Download
GPSUP150	150	95	95	208	95	147	400	238	647	524	428	50	112	Download
GPSUP175	175	105	108	238	105	169	410	275	688	567	485	50	160	Download