




Green Pin® Sling Shackle Bow Type with Safety Nut and Bolt Pin – GPSL

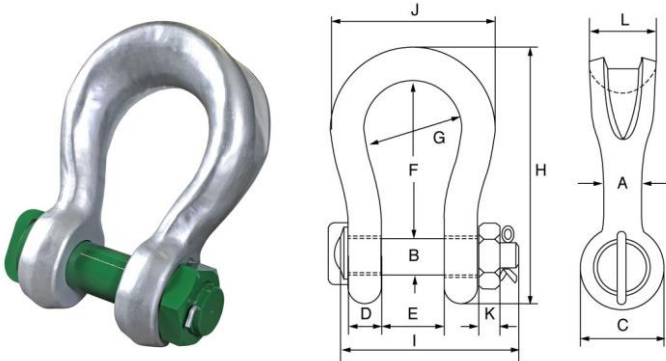

- Grade 8 alloy steel body and pin, quenched and tempered.
- Hot dipped galvanised finish up to 55t.
- 75t and above shackle body silver painted, pin green painted.
- Minimum breaking load is 5 times the W.L.L.
- Temperature range -20°C up to +200°C.
- 5% forging tolerance on inside width and length.
- Certification available **2.1** **3.1** **DoC** **LROS** **MPI** **US**

* For shackles \geq W.L.L. 75t

P-6033

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	J	K	L	Weight	Technical Specification
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	
GPSL7	7	22	22	46	19	32	96	64	153	115	110	19	41	2	Download
GPSL12.5	12.5	28	28	61	25	44	121	82	197	151	146	24	54	4	Download

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	J	K	L	Weight	Technical Specification
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kg	
GPSL18	18	35	35	69	30	54	148	102	239	175	180	29	64	7	Download
GPSL30	30	40	42	90	35	69	165	126	279	211	200	34	79	13	Download
GPSL40	40	55	51	109	45	84	199	140	331	252	235	38	97	22	Download
GPSL55	55	60	57	115	55	90	240	160	389	299	270	45	100	50	Download
GPSL75	75	70	70	140	70	110	290	185	473	317	317	54	120	67	Download
GPSL125	125	85	80	155	85	137	366	220	583	413	390	64	150	105	Download
GPSL150	150	94	95	180	89	147	391	253	645	445	434	50	170	160	Download
GPSL200	200	110	105	200	100	158	481	280	759	480	482	50	205	220	Download
GPSL250	250	126	120	228	110	179	542	300	859	535	530	60	240	320	Download
GPSL300	300	135	134	245	122	195	601	350	947	590	620	70	265	350	Download
GPSL400	400	160	160	295	145	231	576	370	985	675	690	80	320	635	Download
GPSL500	500	170	180	330	160	263	681	450	1131	748	790	90	340	803	Download
GPSL600	600	190	200	350	170	289	741	490	1234	809	865	100	370	980	Download
GPSL700	700	200	215	392	190	315	751	540	1284	879	901	100	400	1,260	Download
GPSL800	800	218	230	420	200	342	851	554	1426	942	947	110	420	1,430	Download
GPSL900	900	242	255	466	220	368	851	580	1488	1023	1023	120	440	1,650	Download
GPSL1000	1000	260	270	490	240	399	851	614	1532	1103	1107	120	460	2,120	Download
GPSL1250	1250	285	300	510	260	452	931	650	1666	1227	1182	150	530	2,400	Download
GPSL1550	1550	285	320	550	280	483	950	680	1710	1300	1253	150	560	3,600	Download