




## Green Pin® Spring Pin ROV Shackle – GPROV5363

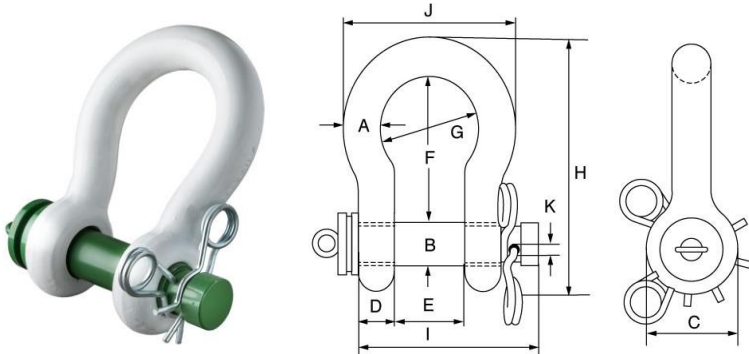

- Grade 8 polar quality alloy steel body and pin, quenched and tempered.
- White painted body and green painted pin.
- Minimum breaking load is 5 times the W.L.L.
- Temperature range -60°C up to +200°C.
- For in-line use only, supplied without wires; design your own wiring plan.
- Full CAD support available upon request.
- Certification available **2.1** **3.1** **DoC**

# P-5363

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	J	K	Weight	Technical
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs	Specification
GPROV53636.5	6.5	22	25	52	22	36	83	58	144	130	102	5.5	1.7	<a href="#">Download</a>
GPROV53639.5	9.5	28	32	66	28	47	108	75	185	166	131	6.5	3.4	<a href="#">Download</a>
GPROV536312	12	32	35	72	32	51	115	83	201	184	147	6.5	4.7	<a href="#">Download</a>

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	J	K	Weight	Technical
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs	Specification
GPROV536317	17	38	42	88	38	60	146	99	249	202	175	6.5	8	<a href="#">Download</a>
GPROV536325	25	45	50	103	45	74	178	126	300	243	216	8.5	13.6	<a href="#">Download</a>
GPROV536335	35	50	57	116	50	83	197	138	334	269	238	8.5	19.1	-
GPROV536342.5	42.5	57	65	130	57	95	222	160	377	301	274	8.5	28.3	-
GPROV536355	55	65	70	145	65	105	260	180	433	329	310	8.5	38	<a href="#">Download</a>
GPROV536385	85	75	83	162	73	127	329	190	527	375	340	8.5	60	<a href="#">Download</a>