




## Green Pin® Square Head Bow Shackle – GPSQB

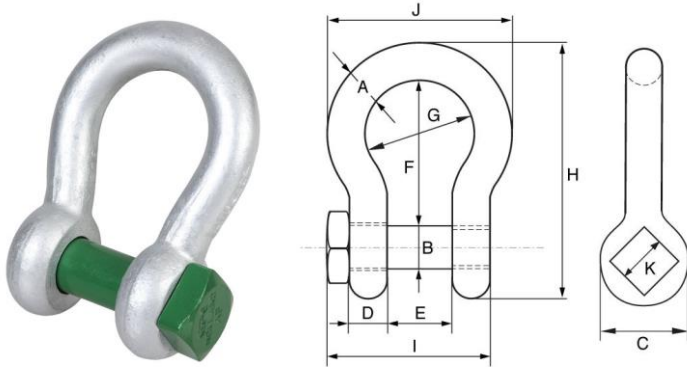

- Grade 6 high tensile steel body and pin, quenched and tempered.
- Hot dipped galvanised finish.
- Conforms to BS EN 13889, ASME B30.26 and meets the W.L.L. performance requirements of US Fed. Spec. RR-C-271, Grade A.
- Minimum breaking load is 6 times the W.L.L.
- Temperature range -20°C up to +200°C.
- Certification available **2.1** **3.1** **DoC**

# G-4164

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	J	K	Weight
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs
GPSQB2	2	13.5	16	34	13	22	51	32	89	57.5	58	22	0.34
GPSQB3.25	3.25	16	19	40	16	27	64	43	110	71	75	27	0.63
GPSQB4.75	4.75	19	22	46	19	41	76	51	129	82	89	32	1

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	J	K	Weight
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs
GPSQB6.5	6.5	22	25	52	22	36	83	58	144	93	102	32	1.44
GPSQB8.5	8.5	25	28	59	25	43	95	68	164	108	118	36	2.21
GPSQB9.5	9.5	28	32	66	28	47	108	75	185	120	131	41	3.18
GPSQB12	12	32	35	72	32	51	115	83	201	137	147	50	4.32
GPSQB13.5	13.5	35	38	80	35	57	133	92	227	149	162	50	5.67
GPSQB17	17	38	42	88	38	60	146	99	249	164	175	60	7.36
GPSQB25	25	45	50	103	45	74	178	126	300	192	216	60	12.38