




Green Pin® Square Head Dee Shackle – GPSQD

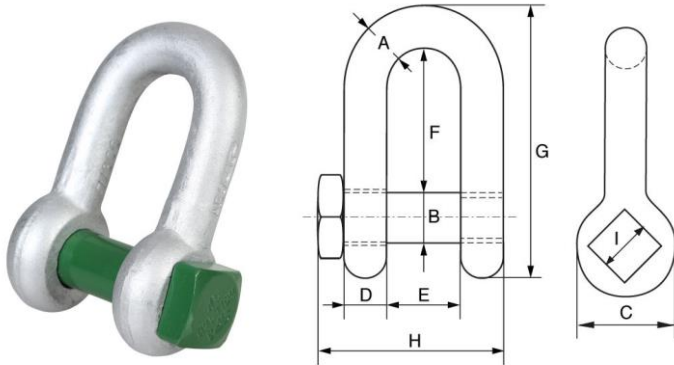

- Grade 6 high tensile steel body and pin, quenched and tempered.
- Hot dipped galvanised finish.
- Conforms to BS EN 13889, ASME B30.26 and meets the W.L.L. performance requirements of US Fed. Spec. RR-C-271, Grade A.
- Minimum breaking load is 6 times the W.L.L.
- Temperature range -20°C up to +200°C.
- Certification available **2.1** **3.1** **DoC**

G-4154

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	Weight
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs
GPSQD2	2	13.5	16	34	13	22	43	81	57.5	22	0.32
GPSQD3.25	3.25	16	19	40	16	27	51	97	71	27	0.58
GPSQD4.75	4.75	19	22	46	19	31	59	112	82	32	0.92

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	Weight
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs
GPSQD6.5	6.5	22	25	52	22	36	73	134	93	32	1.33
GPSQD8.5	8.5	25	28	59	25	43	85	154	108	36	2.03
GPSQD9.5	9.5	28	32	66	28	47	90	167	120	41	2.88
GPSQD12	12	32	35	72	32	51	94	180	137	50	3.96
GPSQD13.5	13.5	35	38	80	35	57	115	209	149	50	5.24
GPSQD17	17	38	42	88	38	60	127	230	164	60	6.8
GPSQD25	25	45	50	103	45	74	149	271	192	60	11.22