




Green Pin® Square Sunken Hole Bow Shackle – GPSQSUB

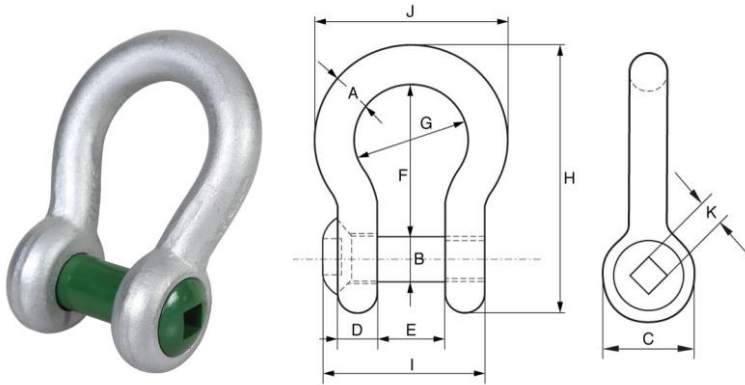

- Grade 6 high tensile steel body and pin, quenched and tempered.
- Hot dipped galvanised finish.
- Conforms to BS EN 13889, ASME B30.26 and meets the W.L.L. performance requirements of US Fed. Spec. RR-C-271, Grade A.
- Minimum breaking load is 6 times the W.L.L.
- Temperature range -20°C up to +200°C.
- Key for unscrewing pin supplied separately (E-4170).
- Certification available **2.1** **3.1** **DoC**

G-4169

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	J	K	Weight
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs
GPSQSUB2	2	13.5	16	34	13	22	51	32	89	51	58	11	0.31

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	J	K	Weight
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs
GPSQSUB3.25	3.25	16	19	40	16	27	64	43	110	63	75	11	0.56
GPSQSUB4.75	4.75	19	22	46	19	31	76	51	129	74	89	11	0.98
GPSQSUB6.5	6.5	22	25	52	22	36	83	58	144	85	102	13	1.46
GPSQSUB8.5	8.5	25	28	59	25	43	95	68	164	99	118	13	2.18
GPSQSUB9.5	9.5	28	32	66	28	47	108	75	185	110	131	17	3.06
GPSQSUB12	12	32	35	72	32	51	115	83	201	122	147	17	4.24
GPSQSUB13.5	13.5	35	38	80	35	57	133	92	227	135	162	17	5.59
GPSQSUB17	17	38	42	88	38	60	146	99	249	145	175	17	7.37