




Green Pin® Square Sunken Hole Dee Shackle – GPSQSUD

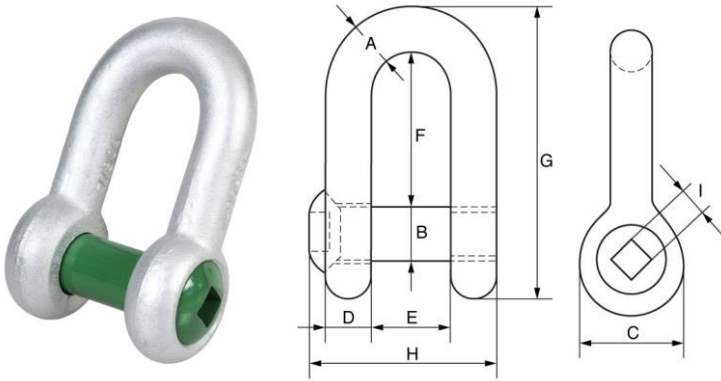

- Grade 6 high tensile steel body and pin, quenched and tempered.
- Hot dipped galvanised finish.
- Conforms to BS EN 13889, ASME B30.26 and meets the W.L.L. performance requirements of US Fed. Spec. RR-C-271, Grade A.
- Minimum breaking load is 6 times the W.L.L.
- Temperature range -20°C up to +200°C.
- Key for unscrewing pin supplied separately (E-4170).
- Certification available **2.1** **3.1** **DoC**

G-4159

Product Code	W.L.L	A	B	C	D	E	F	G	H	I	Weight
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs
GPSQSUD2	2	13.5	16	34	13	22	43	81	51	11	0.34

Product Code	W.L.L	A	B	C	D	E	F	G	H	I	Weight
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs
GPSQSUD3.25	3.25	16	19	40	16	27	51	97	63	11	0.6
GPSQSUD4.75	4.75	19	22	46	19	31	59	112	74	11	0.98
GPSQSUD6.5	6.5	22	25	52	22	36	73	134	85	13	1.26
GPSQSUD8.5	8.5	25	28	59	25	43	85	154	99	13	2.14
GPSQSUD9.5	9.5	28	32	66	28	47	90	167	110	17	3.05
GPSQSUD12	12	32	35	72	32	51	94	180	122	17	3.56
GPSQSUD13.5	13.5	35	38	80	35	57	115	209	135	17	5.17
GPSQSUD17	17	38	42	88	38	60	127	230	145	17	6.84