




Green Pin® Standard Bow Shackle with Safety Nut and Bolt Pin – GPSAB

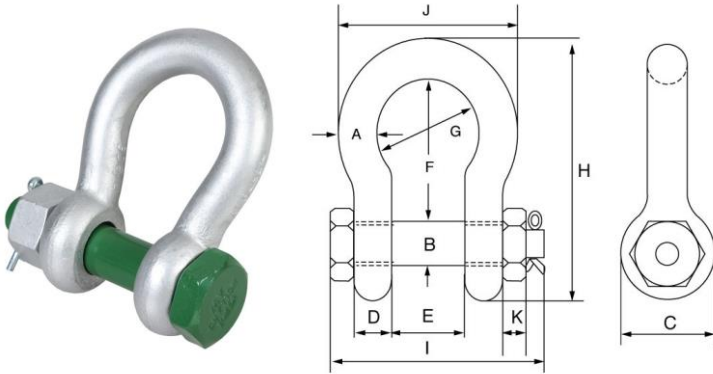

- Grade 6 high tensile steel body and pin, quenched and tempered.
- Hot dipped galvanised finish.
- Conforms to BS EN 13889 (from 0.5t to 25t) and meets the performance requirements of US Fed. Spec. RR-C-271 type IVA class 2, grade A.
- From 2t and upward these shackles comply with ASME B30.26.
- Minimum breaking load is 6 times the W.L.L.
- Temperature range -40°C up to +200°C.
- Full CAD support available upon request.
- Certification available **2.1** **3.1** **DoC** **DNV GL 2.7-1** **DNV GL 0378**

G-4163

Product Code	W.L.L.	A	B	C	D	E	F	G	H	I	J	K	Weight	Technical Specification
	t	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	kgs	
GPSAB.5	0.5	7	8	17	7	12	29	20	48.5	42	34	4	0.06	Download
GPSAB.75	0.75	9	10	21	9	13.5	32	22	56	50	40	5	0.11	Download
GPSAB1	1	10	11	23	10	17	36.5	26	63.5	60	46	8	0.16	Download
GPSAB1.5	1.5	11	13	26	11	19	43	29	74	67	51	11	0.22	Download
GPSAB2	2	13.5	16	34	13.5	22	51	32	89	82	58	13	0.42	Download
GPSAB3.25	3.25	16	19	40	16	27	64	43	110	98	75	17	0.74	Download
GPSAB4.75	4.75	19	22	47	19	31	76	51	129	114	89	20	1.18	Download
GPSAB6.5	6.5	22	25	53	22	36	83	58	144	130	102	23	1.77	Download
GPSAB8.5	8.5	25	28	60	25	43	95	68	164	150	118	25	2.58	Download
GPSAB9.5	9.5	28	32	67	28	47	108	75	185	166	131	28	3.66	Download
GPSAB12	12	32	35	74	32	51	115	83	201	178	147	31	4.91	Download
GPSAB13.5	13.5	35	38	80	35	57	133	92	227	197	162	34	6.54	Download
GPSAB17	17	38	42	89	38	60	146	99	249	202	175	19	8.19	Download
GPSAB25	25	45	50	104	45	74	178	126	300	249	216	24	14.22	Download
GPSAB35	35	50	57	111	50	83	197	138	331	269	238	27	19.85	Download
GPSAB42.5	42.5	57	65	134	57	95	222	160	377	301	274	30	28.33	Download
GPSAB55	55	65	70	145	65	105	260	180	433	330	310	33	39.59	Download
GPSAB85	85	75	83	163	75	127	329	190	527	380	340	40	62	Download