




## Green Pin® Standard Dee Shackle with Safety Nut and Bolt Pin – GPSAD

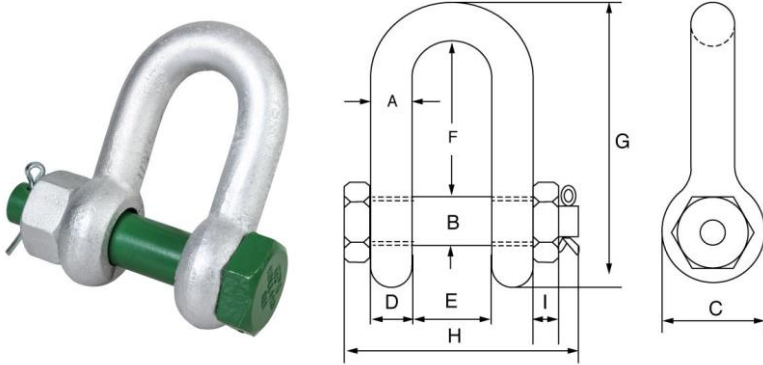

- Grade 6 high tensile steel body and pin, quenched and tempered.
- Hot dipped galvanised finish.
- Conforms to BS EN 13889 (from 2t to 25t) and meets the performance requirements of US Fed. Spec. RR-C-271 type IVA class 2, grade A.
- From 2t and upward these shackles comply with ASME B30.26.
- Minimum breaking load is 6 times the W.L.L.
- Temperature range -40°C up to +200°C.
- Full CAD support available upon request.
- Certification available **2.1** **3.1** **DoC** **DNV GL 2.7-1** **DNV GL 0378**

# G-4153

Product Code	W.L.L. t	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight kgs	Technical Specification
GPSAD2	2	13.5	16	34	13	22	43	81	82	13	0.39	<a href="#">Download</a>
GPSAD3.25	3.25	16	19	40	16	27	51	97	98	17	0.67	<a href="#">Download</a>
GPSAD4.75	4.75	19	22	46	19	31	59	112	114	20	1.08	<a href="#">Download</a>
GPSAD6.5	6.5	22	25	52	22	36	73	134	130	23	1.66	<a href="#">Download</a>
GPSAD8.5	8.5	25	28	59	25	43	85	154	150	25	2.46	<a href="#">Download</a>
GPSAD9.5	9.5	28	32	66	28	47	90	167	166	28	3.4	<a href="#">Download</a>
GPSAD12	12	32	35	72	32	51	94	180	178	31	4.51	<a href="#">Download</a>
GPSAD13.5	13.5	35	38	80	35	57	115	209	197	34	6.1	<a href="#">Download</a>
GPSAD17	17	38	42	88	38	60	127	230	202	19	7.63	<a href="#">Download</a>
GPSAD25	25	45	50	103	45	74	149	271	249	24	13.25	<a href="#">Download</a>
GPSAD35	35	50	57	111	50	83	171	305	269	27	18.53	<a href="#">Download</a>
GPSAD42.5	42.5	57	65	130	57	95	190	345	301	30	25.94	<a href="#">Download</a>
GPSAD55	55	65	70	145	65	105	203	376	330	33	35.33	<a href="#">Download</a>
GPSAD85	85	75	83	162	73	127	229	427	380	40	52.97	<a href="#">Download</a>