




Green Pin® Standard Dee Shackle with Screw Collar Pin – GPSCD

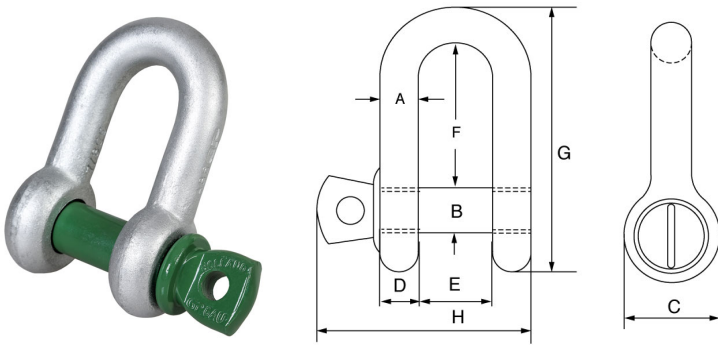

- Grade 6 high tensile steel body and pin, quenched and tempered.
- Hot dipped galvanised finish.
- Conforms to BS EN 13889 (from 0.5t to 25t) and meets the performance requirements of US Fed. Spec. RR-C-271 type IVA class 2, grade A.
- From 2t and upward these shackles comply with ASME B30.26.
- Minimum breaking load is 6 times the W.L.L.
- Temperature range -40°C up to +200°C.
- Full CAD support available upon request.
- Certification available **2.1** **3.1** **DoC** **DNV GL 0378**

G4151

Product Code	W.L.L.	A	B	C	D	E	F	G	H	Weight	Technical
											Specification
	t	mm	mm	mm	mm	mm	mm	mm	mm	kgs	
GPSCD.33	0.33	5	6	12	5	9.5	19	33	29.5	0.02	Download
GPSCD.5	0.5	7	8	16.5	7	12	22	41.5	38	0.05	Download
GPSCD.75	0.75	9	10	20	9	13.5	26	50	46.5	0.09	Download
GPSCD1	1	10	11	22.5	10	17	32	59	54	0.14	Download
GPSCD1.5	1.5	11	13	26.5	11	19	37	68	59.5	0.19	Download
GPSCD2	2	13.5	16	34	13.5	22	43	81	73	0.32	Download
GPSCD3.25	3.25	16	19	40	16	27	51	97	89	0.54	Download
GPSCD4.75	4.75	19	22	47	19	31	59	112	103	0.87	Download
GPSCD6.5	6.5	22	25	53	22	36	73	134	119	1.34	Download
GPSCD8.5	8.5	25	28	60	25	43	85	154	137	2.08	Download
GPSCD9.5	9.5	28	32	67	28	47	90	167	153	2.77	Download
GPSCD12	12	32	35	74	32	51	94	180	170	3.72	Download
GPSCD13.5	13.5	35	38	80	35	57	115	209	186	5.14	Download
GPSCD17	17	38	42	89	38	60	127	230	203	6.85	Download
GPSCD25	25	45	50	104	45	74	149	271	243	11.45	Download
GPSCD35	35	50	57	111	50	83	171	305	272	16.86	Download
GPSCD42.5	42.5	57	65	134	57	95	190	345	310	24.61	Download
GPSCD55	55	65	70	145	65	105	203	376	344	32.65	Download