



Steel

- P04 - RescuePro Pulley
- P05 - RescuePro Twin Pulley
- P06 - Double Ended RescuePro Pulley

Aluminium

- P02 - Rescue Pulley
- P03 - Rescue Prussik Pulley


Pre-Use Checks

- Ensure there is no significant damage or wear.
- Ensure pulley wheel rotates freely.
- Ensure cheeks are locked closed by connector.


In Use

- Working Load Limit for persons: 300kg
- Total breaking load: 30kN

Do not run any pulley against an edge as a severe bending force will be created.



Example Lifting Systems:

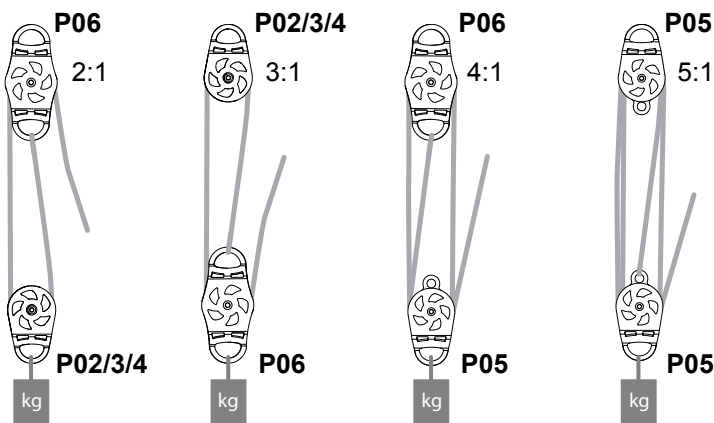



Markings

Ø13mm MAX Max 13mm diameter low stretch rope

30kN 30kN Maximum load - 30kN

20kN Maximum load lower eye - 20kN (P05 only)


Maximum loadings

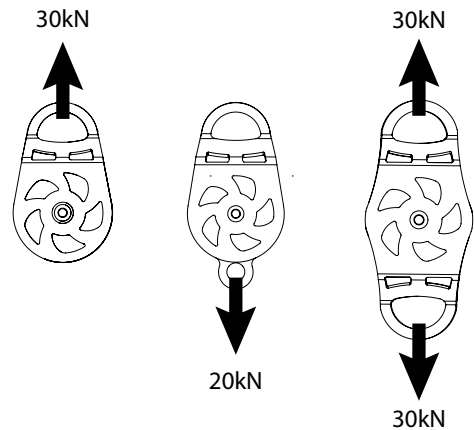

Remember that the load experienced by the pulley and anchor point is twice that of the load being lifted.

Attachment

All attachments should be made through all cheeks of the main attachment point, which will accept up to three 12mm connectors.

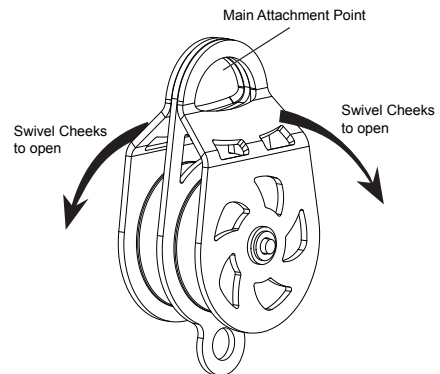

Warnings

Do NOT run any pulley against an edge as a severe bending force will be created.
Do NOT use with wire cables.