GASES DETECTED

CO2BUDDY

Personal CO₂ Safety Alarm

The CO2BUDDY personal alarm is designed to detect carbon dioxide (CO2) and warn of any dangerous levels in confined spaces, providing continuous protection for those working in an environment where CO2 is present. This extremely lightweight personal alarm can be easily clipped to a pocket or belt, or can be attached to a lanyard.

The CO2BUDDY is suitable for a wide variety of applications where CO2 is used including pub and bar cellars, walk in coolers, fast food outlets, agricultural grow houses, medical laboratories and food packaging plants. CO2BUDDY ensures personal protection for delivery drivers, servicing engineers and maintenance personnel who work in multiple locations where CO2 is used but is not guaranteed to be monitored by a fixed system.


Charged via a Micro USB cable, the CO2BUDDY is easy and convenient to keep fully powered. The CO2BUDDY is a robust, but lightweight safety alarm from Analox, one of the world's leading gas monitor companies with facilities in the UK and US.

Standards including EH40 in Europe and OSHA throughout the US mandate that employees should not be exposed to potentially dangerous levels of CO2 as it can prove to be highly toxic in very small concentrations.

CO2BUDDY has two alarm levels (low and high) which are uniquely identified to the user through different audible and visual sequences. CO2BUDDY also monitors a time weighted average (TWA) of exposure to CO2 over an eight hour period and will go into alarm if the TWA of CO2 is above 0.5%.

The low and high alarm levels can easily be altered from the factory defaults by selecting from a choice of alarm configurations during commissioning of a unit.

Alarm configurations supported include 1.5% and 3%, 0.5% and 1.5%, 1.5% and 4%, 1% and 2%.

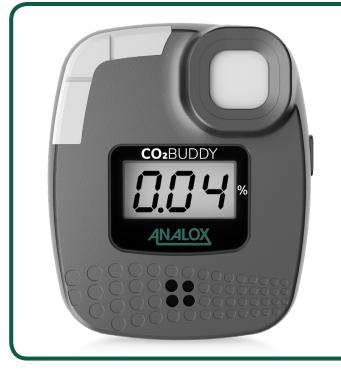

KEY FEATURES

- Lightweight Max weight 70g
- Rechargeable battery
- Single button operation
- Fresh air calibration
- Low maintenance
- Choice of low and high alarm point configurations available

TWA Alarm

Every day, we save lives.



CO2

SYSTEM SPECIFICATIONS

Display: LCD

Power: Internal battery providing a minimum of 12 hours of operation on a single charge with low battery warning

Max Dimensions: 74.4mm x 62.6mm x 33.3mm (hxwxd)

Charging: Via Micro USB cables

IP Rating: 54

Mounting: pocket, belt or lanyard

Approvals: CE, FCC

Alarm indicators: Audible, Red Strobe, Vibration



An increase as small as 0.5% of CO₂ can be harmful to human health. Everyday, we save lives.

Analox has a policy of continuous improvement and we reserve the right to upgrade or change specifications without prior notice. If you require a datasheet in another language please contact us.

www.analoxsensortechnology.com



UK: +44 (0) 1642 711400 US: (714) 891-4478



info@analox.biz

ANALOX Sensor Technology

QIC

HOU KNO