



SS-C4 Offshore Chain Hoist

The William Hackett SS-C4 Offshore Chain Hoist meets and exceeds the requirements of the following international standards:

- British Standard BS EN13157:2004 + A1:2009
- American Standard ASME B30.16-2012
- Australian Standard AS1418.2-1997
- South African Standard SANS 1594:2007
- NORSOK R-002: 2017.

The William Hackett SS-C4 offshore chain hoist is manufactured in accordance with EN13157 which requires that it can be used within an operating temperature range of -40°C to +55°C.

William Hackett has taken its extensive knowledge acquired in the supply of a specialist topside and subsea hoisting range to the offshore sector and translated this technology to a second generation range of William Hackett SS-C4 offshore chain hoists.

These hoists can be supplied in the following configurations:

- Single hook suspension unit
- Low headroom combined chain hoist and push travel trolley
- Low headroom combined chain hoist and geared travel trolley

All the above hoist configurations can also be supplied with the following options:

- Calibrated Grade T (8) load chain to BS EN818-7 zinc plated with zinc plated hand chain
- Calibrated Grade S (6) 316L stainless steel loadchain, hand chain and bottom hook (stainless steel bottom hooks are only available for 500kg and 1 tonne units)
- Overload protection option is available.

Features

- 500hrs + Protection against salt spray tests according to ASTM B117
- Twin pawls as standard
- Heavy duty forged safety catches
- Stainless steel fixing used throughout the hoist
- Hook housing is bolt connected using cap head screws and nyloc nuts
- All brake components are corrosion protected
- Load chain meets the requirements of European standards EN818-7
- Compact and robust design for easy handling

Performance and Testing


The William Hackett CP-C4 offshore chain hoists have been fully tried and tested to include:

- Minimum Breaking Load - a minimum of 4 x the WLL
- The load chain anchor / end stop tested to at least 2.5 x the WLL with no restriction of either the brake or gears
- All Hoists are 100% proof tested at 1.5 x the Working Load Limit
- Light load of 2% of Working Load Limit




Specifications

Single Fall

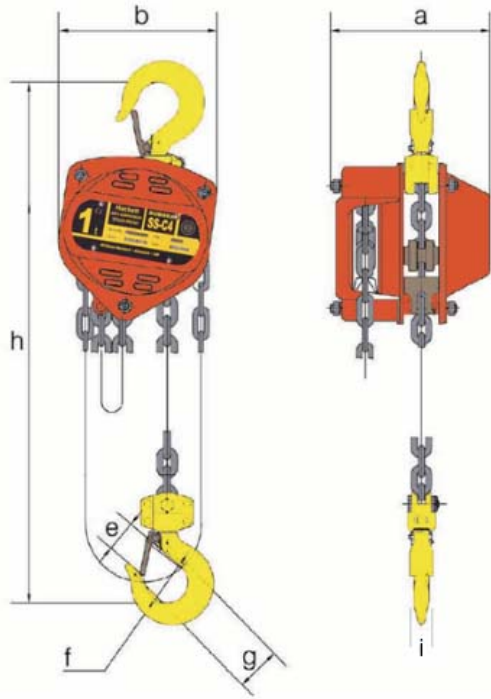

Multi Fall

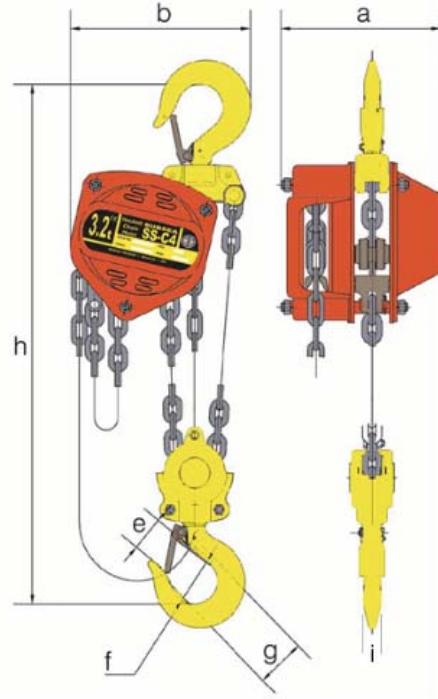

Part Code	WLL tonnes	No. of Falls	Load Chain Size (mm)	a mm	b mm	e mm	f mm	g mm	h mm	i mm	Mass kg 3m HOL	Extra Weight per m kg
022.SS.053	0.50	1	5.0 x 15	125	130	27.5	32	37	280	12.3	7.8	0.5
022.SS.103	1.00	1	6.0 x 18	134	155	31.5	40	44	306	15.3	11.1	0.8
022.SS.203	2.00	1	8.0 x 24	157	185	36.5	46	52	445	20.8	16.8	1.3
022.SS.32D03	3.20	2	8.0 x 24	157	235	43.5	52	62	520	24.7	24.2	3.6
022.SS.503	5.00	2	10.0 x 30	180	262	51.0	60	77	600	33.5	38.4	5.2
022.SS.1003	10.0	4	10.0 x 30	180	406	53.0	85	-	760	41.0	68.9	9.5
022.SS.1503	15.0	6	10.0 x 30	210	406	80.0	100	-	1000	59.0	116.7	13.9
022.SS.2003	20.0	8	10.0 x 30	225	550	80.0	110	-	1150	59.0	149.5	19.0
022.SS.3003	30.0	12	10.0 x 30	360	680	80.0	110	-	1250	70.0	230.0	27.7
022.SS.5003	50.0	20	10.0 x 30	585	832	133.0	170	-	1700	170.0	750.0	45.8



William Hackett

William Hackett Lifting Products Ltd Oak Drive, Lionheart Enterprise Park, Alnwick, Northumberland NE66 2EU
Email: liftingsales@williamhackett.co.uk Tel: +44 (0)1665 604200 Fax: +44 (0)1665 604204

William Hackett Chain Products Ltd Maypole Fields, Cradley, Halesowen, West Midlands B63 2QE.
Email: info@williamhackett.co.uk Tel: +44 (0)1384 569431 Fax: +44 (0)1384 639157

Web: www.williamhackett.co.uk



Better connected with William Hackett