

TECHNICAL DATA SHEET

SUPER SLIDER BEAM ANCHOR

TDS83



CHECKMATE Super Slider Beam Anchor

Designed to slide along the beam as the user traverses its length ensuring the attachment point remains above the worker to reduce fall distances and the effects of a pendulum swingfall.



Trigger Adjusters

Mechanism engages and dis-engages using a simple trigger design.



Aluminium paw

Lightweight but strong and durable for maximum efficiency.




Swivel D Ring

Swivels a full 360 degrees to ensure attachments do not become entangled or twisted.



Bar Swivel

Approximately 270° rotation allows for optimum work positioning.



Paw Inserts

The paws carry an alloy insert to protect the paw from direct wear and tear. The inserts are designed to be self lubricating.



Support Bar


10 notches on each side of the aluminium bar gives a total of 20 fixed widths ensuring excellent versatility and range.



ordering information

Part No.	Description	Weight
▼ BWA012N	Super Slider Beam Anchor	1.6kg

slider beam dimensions

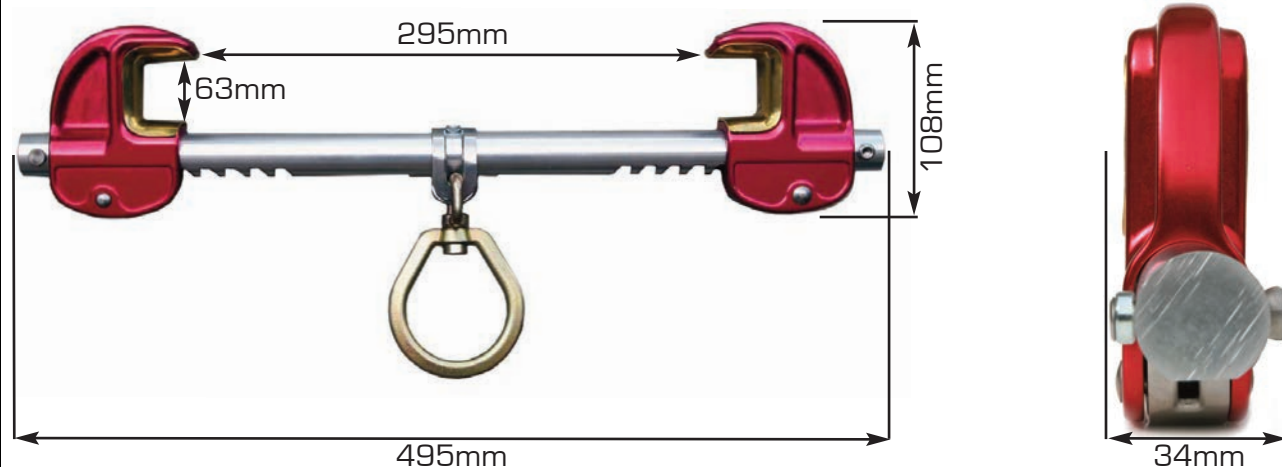

beam dimensions

- ▼ **Flange Width**
From 76mm to 305mm
- ▼ **Flange Thickness**
From 6.35mm to 63mm

specifications

- ▼ **UTS**
22kN
- ▼ **Max User Weight**
137kg

standards

- ▼ ANSI Z359.1-2007, Z359.7-2011
- ▼ OSHA 1926.502
- ▼ CE 0321
- ▼ EN 795:1996 (+A1:2000) Class B



principal materials

- ▼ **Paw**
Aluminium
- ▼ **Support Bar**
Aluminium
- ▼ **Swivel D-Ring**
Zinc Plated Steel
- ▼ **D-Ring Mount**
Stainless Steel
- ▼ **Paw Inserts**
Bronze



CHECKUSOUT

www.checkmateuk.com

