



Tiger Lifting



www.tigerlifting.com

Tiger

Home of the Tiger hoisting, winching and height safety ranges

Tiger Industrial Range

Industrial range of chain blocks, lever hoists, trolleys and beam clamps



Main Features

- Plain/push and geared trolleys - 500kg – 5.0t
- Beam Clamps - 1.0t to 10.0t
- Chain Blocks - 500kg – 5.0t
- Lever Hoists - 750kg – 6.0t
- Rugged steel body construction yet lightweight and portable
- Meets or exceeds all international standards

Hoists:

- Drop forged & heat-treated alloy hooks
- Safe reliable twin pawl mechanical brake
- High quality alloy calibrated load chain
- Proof tested to 1.5 times rated capacity
- Guaranteed light load protection

Additional Lever Hoist Features

- 360-degree handle rotation
- Heavy duty chain end stop
- Short stroke and low lever pulling effort
- Easy single-hand "freewheeling" operation



SGS



ISO 9001
REGISTERED



ISO 14001
REGISTERED







Technical Data

Lever Hoist

Product Code	Capacity (tonne)	Effort (kg)	Dimensions (mm)							Load Chain		Standard HOL (m)	Mass @ std HOL (kg)	Mass for extra metre HOL (kg)
			A	B	C	D	E	F1	F2	Diameter (mm)	No. of falls			
TRL-0075	0.75	23	128	240	275	158	99	24	38	∅6.3	1	1.5	7.5	0.9
TRL-0150	1.5	26	154	360	320	172	104	34	51	∅7.1	1	1.5	10.0	1.1
TRL-0300	3.0	38	182	360	400	195	108	36	56	∅10.0	1	1.5	18.0	2.2
TRL-0600	6.0	40	242	360	570	195	108	49	70	∅10.0	2	1.5	29.5	4.3

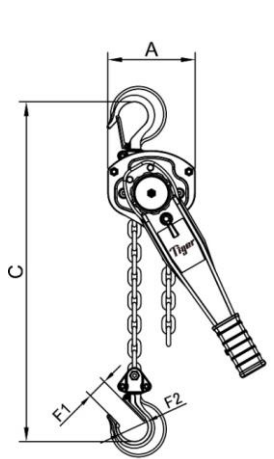


0.75t-3.0t

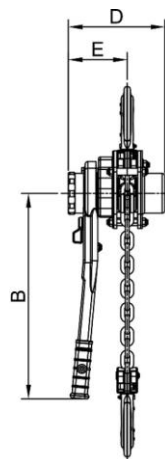


6.0t

Chain Block


Product Code	Capacity (tonne)	Effort (kg)	Dimensions (mm)							Load Chain		Standard HOL (m)	Mass @ std HOL (kg)	Mass for extra metre HOL (kg)
			A	B	C	D	E	F1	F2	Diameter (mm)	No. of falls			
TRC-0050	0.5	21	93	66	305	52	78	24	38	∅6.3	1	3	10.5	1.9
TRC-0100	1.0	25	93	66	340	63	87	28	45	∅6.3	1	3	11.5	1.9
TRC-0150	1.5	32	98	73	385	78	102	34	51	∅7.1	1	3	16.0	2.1
TRC-0200	2.0	34	101	79	420	87	113	35	53	∅8.0	1	3	20.0	2.4
TRC-030T	3.0	34	98	73	465	60	148	36	56	∅7.1	2	3	23.0	3.2
TRC-0500	5.0	37	101	79	575	122	209	49	70	∅8.0	3	3	37.5	5.2

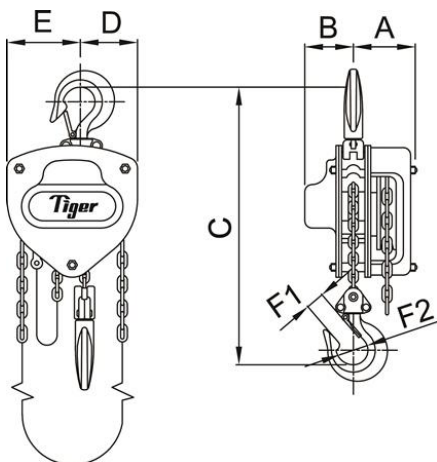

0.5t - 2.0t

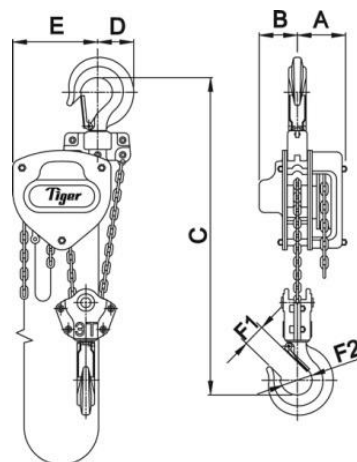

3.0t twin fall

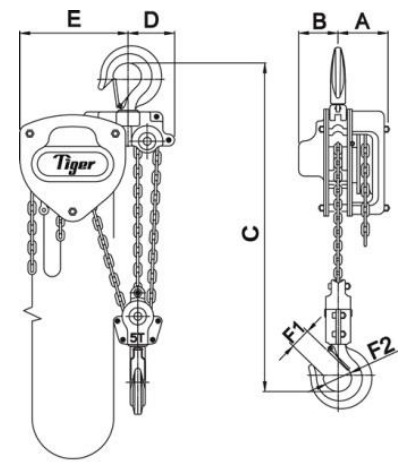


5.0t






Screw Push Trolley

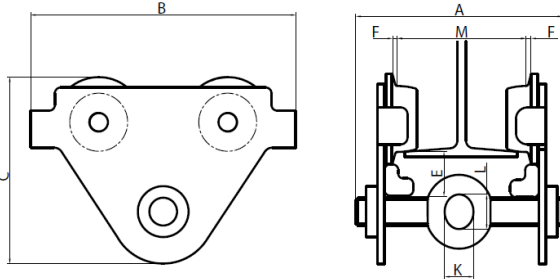


Product Code	Capacity (tonne)	Dimensions (mm)								Net Weight (kg)
		Beam Range M	A	B	C	E	F	K	L	
SPT-0050	0.5t	50-220	300	210	190	33	3	25	30	7.0
SPT-0100	1.0t	64-220	300	260	211	31	3	30	35	10.0
SPT-0200	2.0t	88-220	310	310	236	32	3	40	47	15.5
SPT-0300	3.0t	102-220	320	390	295	46	3	48	58	26.0
SPT-0500	5.0t	114-220	330	450	334	47	3	60	70	38.0

Screw Geared Trolley

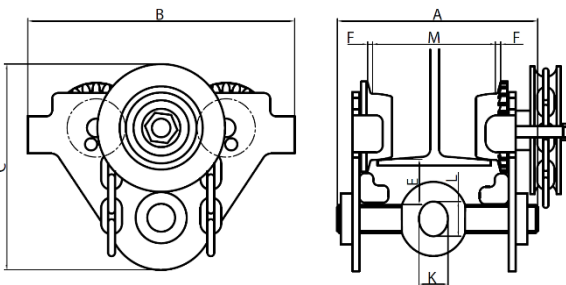

Product Code	Capacity (tonne)	Dimensions (mm)								Net Weight (kg)
		Beam Range M	A	B	C	E	F	K	L	
SGT-0050	0.5t	50-220	300	210	190	33	3	25	30	9.0
SGT-0100	1.0t	64-220	300	260	211	31	3	30	35	13.0
SGT-0200	2.0t	88-220	310	310	236	32	3	40	47	20.5
SGT-0300	3.0t	102-220	320	390	295	46	3	48	58	30.0
SGT-0500	5.0t	114-220	330	450	334	47	3	60	70	45.0

Beam Clamp

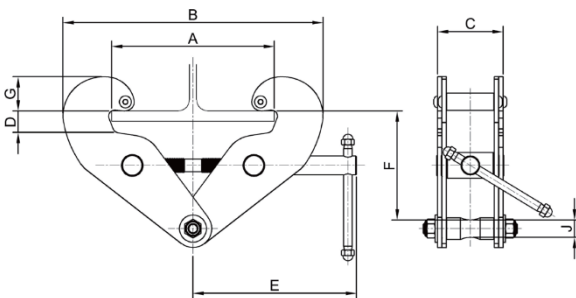

Product Code	Capacity (tonne)	Dimensions (mm)								Net Weight (kg)
		A	B	C	D	E	F	G	J	
BC-0100	1.0	75-210	182-328	77	26	190	144-117	52-38	20	4.0
BC-0200	2.0	75-210	182-328	85	26	190	144-117	52-38	20	4.5
BC-0300	3.0	75-305	214-460	107	35	240	224-179	58-40	22	8.0
BC-0500	5.0	75-305	214-460	121	35	240	224-175	58-40	28	10.0
BC-1000	10.0	120-350	295-510	182	36	300	222-171	71-54	43	24.5

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.





Tiger Lifting



www.tigerlifting.com

Tiger

Home of the Tiger hoisting, winching and height safety ranges

Notes:

Lined area for notes, consisting of approximately 20 horizontal lines.

