

Applications

Lifting and finding of the centre of gravity of out of balance loads with a chain sling.



Description

These accessories are fitted with an automatic locking and unlocking cable.
Sling not provided.

Functioning

Use with a single leg chain sling. In free position, with the sling slack, the chain turns around the load positioner's tube, which permits to move and position it above the presumed load gravity centre.

When lifting, the chain tension automatically locks the position. Should the load be unbalanced too much (more than 70 % effort on 1 leg and less than 30 % on the other), put down the load again. Unlock the chain thanks to the opening cable, move the load positioner with the lifting device and resume the operation until the desired position be obtained. Then the handling of the load can be performed.

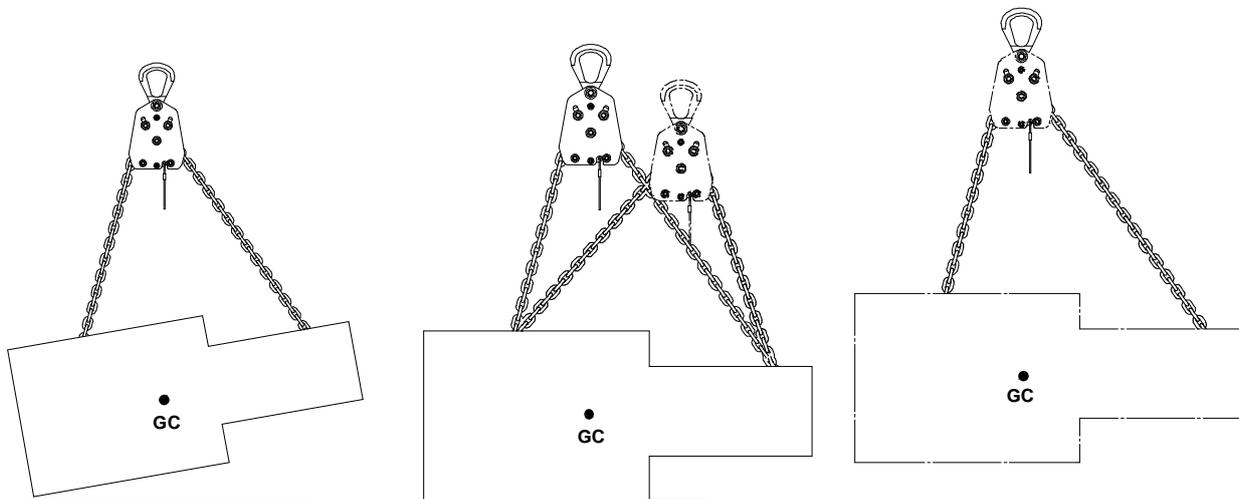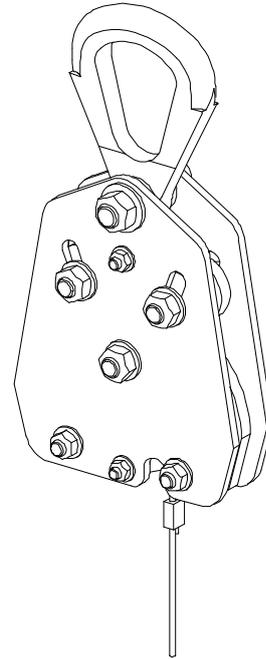

Important instructions

- Make sure the chain fastening points on the piece to be lifted are positioned so as to obtain a maximum sling angle of 120°.
- Use a chain whose dimension and WLL are adapted to the load positioner (chain grade 80 DIN/ ISO 3076).
- For any positioning requiring more than 2 fastening points, use several load positioners.
- The effort distribution must not exceed 70 % on 1 leg and 30 % on the other.
- Working temperature: -20° to +100°C.

General characteristics

- Manufactured without load bearing welds.
- Hot epoxy coating.
- Safety factor: 3 in accordance with the EN 13155.2003 norm.
- Product conforms to the French regulation, in particular the decree of 01/03/2004 relating to the check on lifting devices and the European Directive n°2006/42/CE.
- Product with EC marking and delivered with a declaration of conformity and instructions for use.

Dimensional characteristics

Ref.	Group code	WLL at 120° kg	A	B	C	D	E	F	G	H	Chain Ø	Hole Ø	Hook thickness	Weight kg
TE1.6-7	50858	1 600	252	177	140	69	18	52	16	61	7	6	6	4
TE3-10	50868	3 000	346	260	209	80	23	64	20	88	10	10	10	11
TE4.5-13	50878	4 500	403	313	251	92	36	74	25	110	13	12	12	19

Dimensions in mm

