


WH Hand Winch

A simple, strong, safe and effective hoisting solution for a wide range of applications and industries. Twin Pawl system for added safety under load.

- The positive action brake on the WH hand winch can hold the load in any position.
- The brake is sealed in a strong steel cover to protect from dust and rain.
- It is compact, light weight and is of rugged construction.
- The winch should only be used for pulling.
- A notable feature of the WH hand winch brake system is that it is fitted with two pawls to provide extra safety under all operating conditions.



Specifications

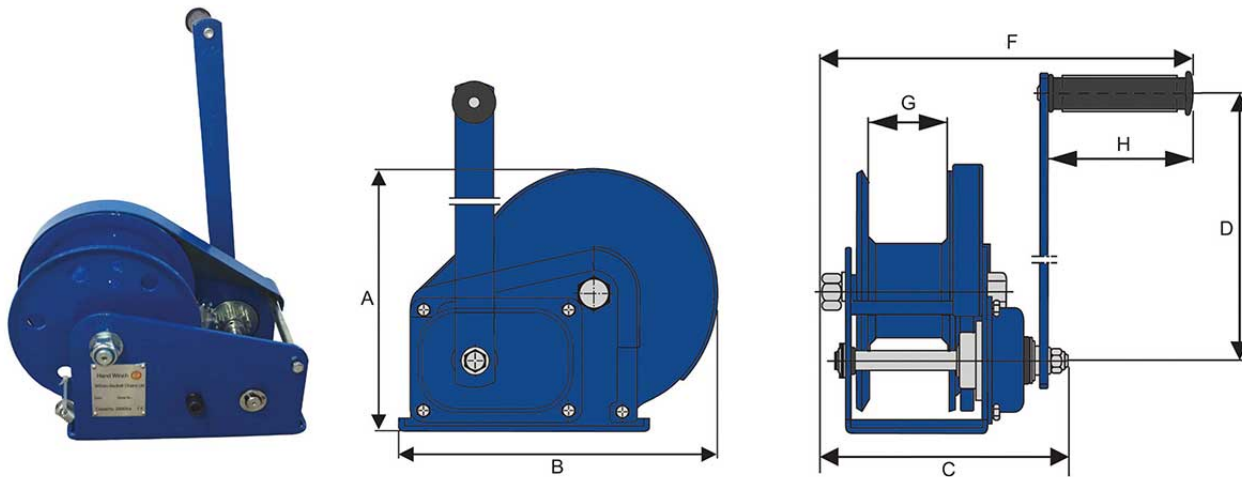

Part Code	A mm	B mm	C mm	D mm	F mm	G mm	H mm	Mass kg
011.120	156	184	157	208	273	51	110	3.7
011.180	203	246	190	319	288	60	110	8.1
011.260	216	294	209	319	307	63	110	10.3

Specifications

Part Code	011.120	011.180	011.260
Pulling Capacity (lb / kg)	1200lb / 550kg	1800lb / 800kg	2600lb / 1180kg
Hand Operated Strength (N)	180	190	190
Transmission / Gear Ratio	4.2 : 1	5 : 1	10 : 1
Rope Diameter	5 mm	7 mm	8 mm
Rope Capacity (m)	25	25	20

The Mount
566 Eutruria Road
Newcastle under Lyme
ST5 0SU