



WH-C4 Chain Hoist

The William Hackett WH-C4 chain hoist meets and exceeds the requirements of the following international standards:

British Standard BS EN13157:2004 + A1:2009
American Standard ASME B30.16-2012
Australian Standard AS1418.2-1997
South African Standard SANS 1594:2007
NORSOK R-002: 2017.

The William Hackett WH-C4 chain hoist is manufactured in accordance with EN13157 which requires that it can be used within an operating temperature range of -40°C to $+55^{\circ}\text{C}$. Please note that the maximum operating temperature range of William Hackett hoists can be increased to 65°C subject to operator competency and safety.


The design and specification of the William Hackett WH-C4 chain hoist includes:

- **WORKING LOAD LIMIT RANGE:** 500kg to 50 tonnes.
- **LIGHT LOAD CAPABILITY:** the WH-C4 is tested and certified at 2% of the chain hoist rated capacity.
- **TWIN PAWL:** double safety; fitted as standard.
- **SAFETY LATCHES:** the WH-C4 chain hoist top and bottom hooks are fitted with heavy duty cast steel latches. The latch and hook tip are integrated creating a strong and robust hook closure.
- **OVERLOAD INDICATOR MARKS:** WH-C4 chain block top and bottom hooks have, as part of the hook forging, overload indicator marks either side of the hook throat. By measuring the distance between the indicator marks, the hook can be quickly and easily checked to see if any stretch has occurred due to misuse or overloading.
- **HAND CHAIN JOINER:** a unique hand chain joiner is used as a quick and secure method of joining the hand chain without the need to cut, bend, open and close a link of existing hand chain.
- **HOOK HOUSING:** the WH-C4 chain hoist top and bottom hook housing are secured with socket head cap screws/hex head bolts and nyloc insert locking nuts.
- **FLEETING/CROSS HAULING:** the WH-C4 chain hoist is tested and certified for fleeting or cross hauling applications up to 45° from the vertical without deration.
- **LOAD CHAIN:** WH-C4 chain blocks are fitted with load chain that fully complies with international standard BS EN818-7 Grade T (8).
- **OVERLOAD LIMITER:** available as an option upon request.




SPECIFICATIONS

Single Fall

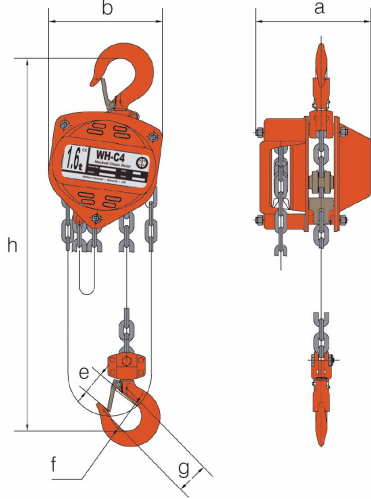

Multi Fall

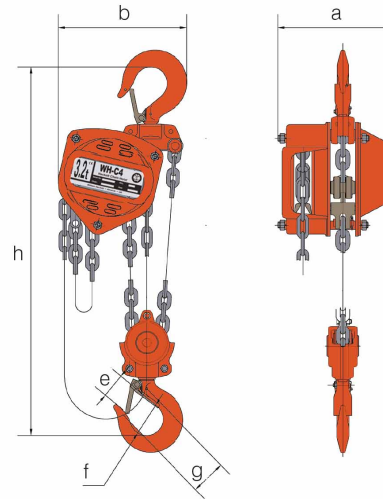

Part Code	WLL tonnes	No. of Falls	Load Chain mm	Hand Chain mm	Standard Lift m	a mm	b mm	e mm	f mm	g mm	h mm	Mass kg 3m HOL	Extra Weight per M kg
022.050	0.50	1	5 x 15	5 x 25	3	125	130	22.5	32	37	280	7.80	1.38
022.100	1.00	1	6 x 18	5 x 25	3	134	155	26.5	40	44	306	11.10	1.62
022.160	1.60	1	8 x 24	5 x 25	3	151	173	32.5	42	48	368	15.80	2.23
022.200	2.00	1	8 x 24	5 x 25	3	157	185	36.5	46	52	445	16.80	2.23
022.32D00	3.20	2	8 x 24	5 x 25	3	157	235	43.5	52	62	520	24.20	3.62
022.500	5.00	2	10 x 30	5 x 25	3	180	262	51.0	60	77	600	38.40	5.18
022.750	7.50	3	10 x 30	5 x 25	3	192	373	64.0	85	-	740	58.20	7.60
022.1000	10.00	4	10 x 30	5 x 25	3	180	365	53.0	85	-	760	68.90	9.52
022/1500	15.00	6	10 x 30	5 x 25	3	210	406	80.0	100	-	1000	116.70	13.86
022/2000	20.00	8	10 x 30	5 x 25	3	225	550	80.0	110	-	1150	149.50	19.03
022/3000	30.00	12	10 x 30	5 x 25	3	360	680	80.0	110	-	1250	230.00	27.71
022/5000	50.00	20	10 x 30	5 x 25	3	585	832	133.0	170	-	1700	750.00	45.80



William Hackett

William Hackett Lifting Products Ltd Oak Drive, Lionheart Enterprise Park, Alnwick, Northumberland NE66 2EU
 Email: liftingsales@williamhackett.co.uk Tel: +44 (0)1665 604200 Fax: +44 (0)1665 604204

William Hackett Chain Products Ltd Maypole Fields, Cradley, Halesowen, West Midlands B63 2QE.
 Email: info@williamhackett.co.uk Tel: +44 (0)1384 569431 Fax: +44 (0)1384 639157

Web: www.williamhackett.co.uk



Better connected with William Hackett