



WH-UBC Universal Beam Clamp

Manufactured in accordance with BS EN13155: 2003 + A2: 2009 - Cranes - Safety – Non Fixed Load Lifting Attachments.

The William Hackett Universal Beam Clamp has been designed not only for vertical use, but also for side load applications, where conventional clamps are not suitable.

The Universal Beam Clamp is suitable for pulling and lifting at angles across the beam or as a semi-permanent anchor point.

It can be **loaded at any angle** and eliminates the use of spreader beams in various lifting operations.

Fitted with an adjustable locking mechanism, ensuring secure clamping to the beam.


Built-in suspension point for low headroom design.

Lightweight design allowing for quick clamping and unclamping.

W.L.L. capacities available at 3.2 tonnes, 5.0 tonnes and 10.0 tonnes and designed to accommodate a range of beam widths.



Specifications

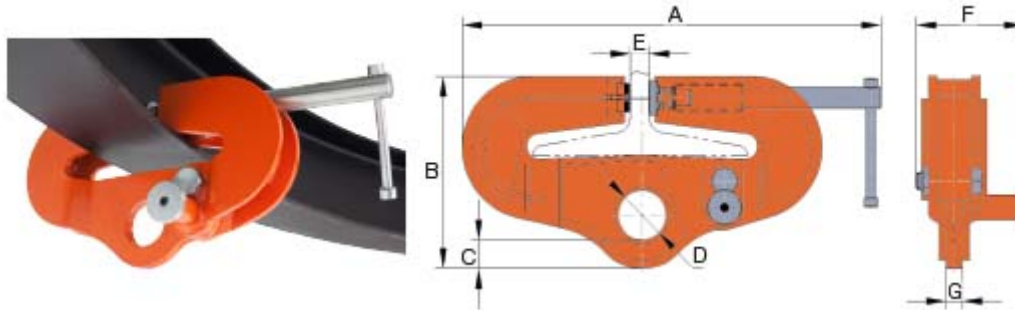

Part Code	WLL tonnes	A mm	B mm	C mm	D mm	E mm	F mm	G mm	Beam Width mm	Mass kg
028.200	2.0	450.0	203	22.5	Ø58	32.5	118	16	125-204	9.5
028.320	3.2	550.0	235	28.0	Ø60	33.0	133	20	125-204	14.7
028.500	5.0	618.5	270	37.5	Ø75	36.0	157	24	125-305	28.3
028.1000	10.0	618.5	270	35.0	Ø80	36.0	225	44	125-305	37.8
028.1000.E	10.0	700.0	298	38.0	Ø80	70.0	230	44	225-405	47.0

