




Yoke Grade 10 Reeveable Links BS EN 1677-1

Hackett Grade 10 forged lifting components are manufactured from alloy steel in accordance with EN1677. All forged components are individually magnaflux crack detected after heat treatment, they are then individually proof load tested to 2.5 times working load limit in accordance with EN1677. Only components fully compliant with all aspects of EN1677 can be used in chain slings certified to EN818-4. Hackett Grade 10 lifting components are suitable for use in a temperature range of -40°C up to 200°C without reduction in working load limit. Testing according to ASTM A952/A - DIN PAS 1061

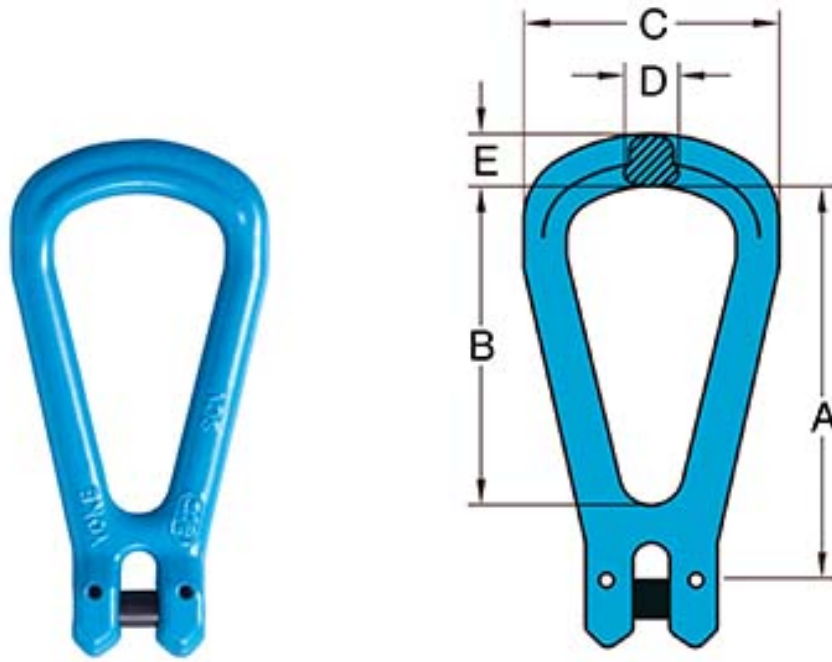

METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	B mm	C mm	D mm	E mm	WLL tonnes	Box Quantity	Mass Kg
X-059-07	7 & 8	99	80	65	15	15	2.5	40	0.4
X-059-10	10	125	100	80	19	18	4.0	20	0.8
X-059-13	13	168	136	108	25	22	6.7	10	1.5
X-059-16	16	198	158	124	27	26	10.0	8	2.4

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	B inch	C inch	D inch	E inch	WLL lbs	Box Quantity	Mass lbs
X-059-07	5/16	3.89	3.15	2.56	0.59	0.59	5500	40	0.88
X-059-10	3/8	4.92	3.94	3.15	0.75	0.70	8800	20	1.76
X-059-13	1/2	6.61	5.35	4.25	0.98	0.86	14700	10	3.30
X-059-16	5/8	7.80	6.22	4.88	1.06	1.02	22000	8	5.29

