


Yoke Grade 10 Clevis Foundry Hook

All Grade 10 lifting components sold by William Hackett Lifting Products comply fully with the relevant section of EN1677, ASTM A952/A and DIN PAS 1061. The grade 10 components are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

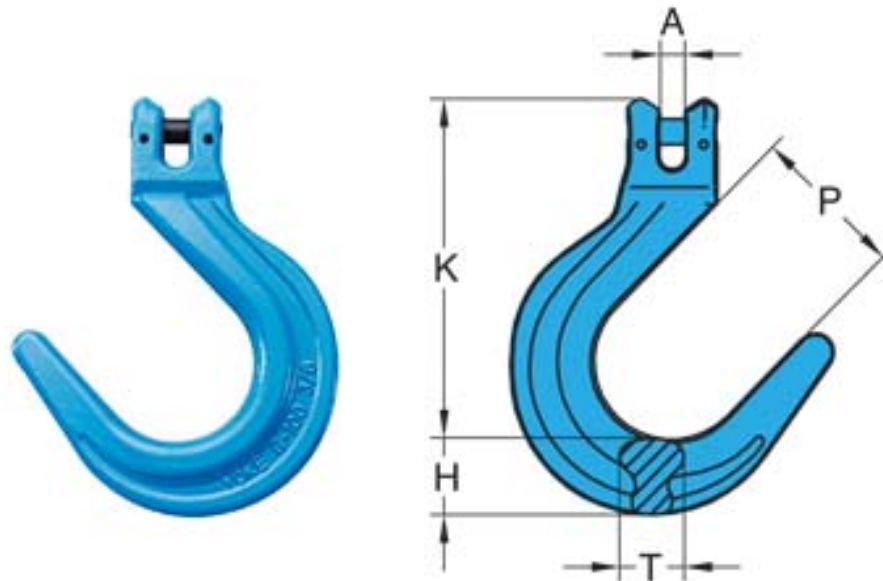

METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	H mm	K mm	P mm	T mm	WLL tonnes	Box Quantity	Mass Kg
X-046-07	7,8	9	27	133	62	19	2.5	25	0.95
X-046-10	10	11	32	163	74	23	4.0	12	1.8
X-046-13	13	14	39	200	88	32	6.7	8	3.6
X-046-16	16	18	47	239	98	41	10.0	5	6.4
X-046-20	20	21	62	305	113	46	16.0	2	11.2

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	H inch	K inch	P inch	T inch	WLL lbs	Box Quantity	Mass lbs
X-046-07	5/16	0.35	1.06	5.23	2.44	0.75	5500	25	2.09
X-046-10	3/8	0.43	1.26	6.41	2.91	0.90	8800	12	3.97
X-046-13	1/2	0.55	1.53	7.87	3.46	1.26	14700	8	7.93
X-046-16	5/8	0.70	1.85	9.40	3.85	1.61	22000	5	14.10
X-046-20	3/4	0.82	2.44	12.00	4.45	1.81	35200	2	24.70

The Mount
 566 Eutruria Road
 Newcastle under Lyme
 ST5 0SU