


Yoke Grade 10 Clevis Self Locking Hook EN1677

All Grade 10 lifting components sold by William Hackett Lifting Products comply fully with the relevant section of EN1677, ASTM A952/A and DIN PAS 1061. The grade 10 components are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

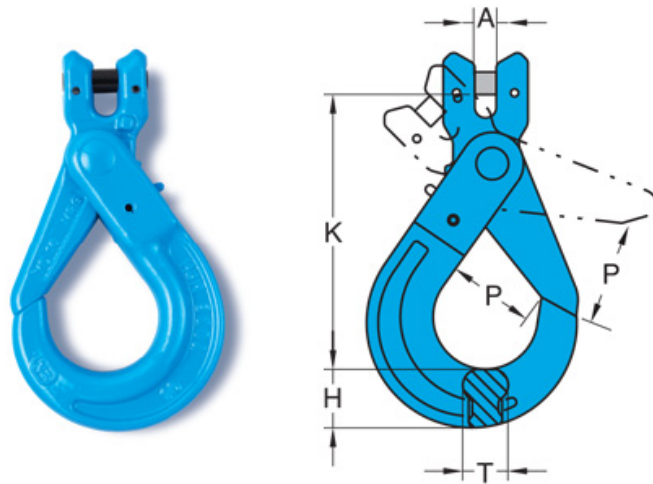

METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	H mm	K mm	P mm	T mm	WLL tonnes	Box Quantity	Mass Kg
X-026-06	6	6	19	93	28	15	1.4	40	0.4
X-026-07	7/8	9	24	119	34	20	2.5	20	0.9
X-026-10	10	11	30	142	44	26	4.0	15	1.4
X-026-13	13	14	39	178	51	30	6.7	6	3.0
X-026-16	16	18	49	213	60	36	10.0	4	5.0
X-026-20	20	21	65	244	70	53	16.0	2	11.0
X-026-22	22	24	63	273	80	49	19.0	2	12.8

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	H inch	K inch	P inch	T inch	WLL lbs	Box Quantity	Mass lbs
X-026-06	1/4	0.24	0.75	3.66	1.10	0.59	3000	40	0.88
X-026-07	5/16	0.35	0.94	4.68	1.33	0.78	5500	20	1.98
X-026-10	3/8	0.43	1.18	5.59	1.73	1.02	8800	15	3.08
X-026-13	1/2	0.51	1.54	7.00	2.00	1.18	14700	6	6.61
X-026-16	5/8	0.70	1.93	8.38	2.36	1.41	22000	4	11.02
X-026-20	3/4	0.83	2.56	9.60	2.75	2.08	35000	2	24.25
X-026-22	7/8	0.94	2.48	10.74	3.15	1.93	41500	2	28.22

The Mount
 566 Eutruria Road
 Newcastle under Lyme
 ST5 0SU