


Yoke Grade 10 Eye Sling Hook

All Grade 10 lifting components sold by William Hackett Lifting Products comply fully with the relevant section of EN1677, ASTM A952/A and DIN PAS 1061. The grade 10 components are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

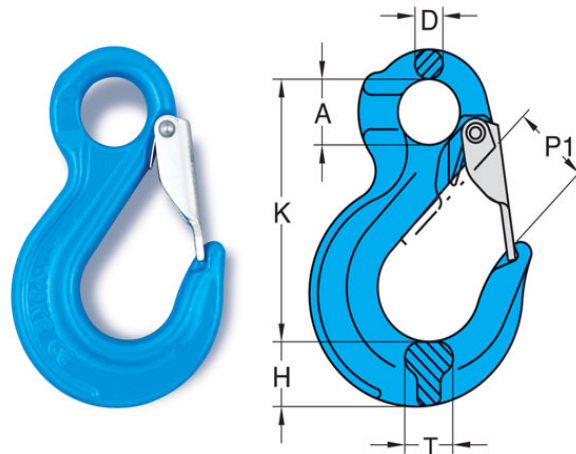

METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	D mm	H mm	K mm	P1 mm	T mm	WLL tonnes	Box Quantity	Mass Kg
X-044/S-07	7,8	25	12	23	98	28	20	2.5	30	0.5
X-044/S-10	10	32	15	31	121	36	23	4.0	20	1.0
X-044/S-13	13	40	18	38	152	40	27	6.7	10	1.8
X-044/S-16	16	50	22	45	185	44	32	10.0	6	3.4
X-044/S-20	20	61	27	64	230	54	48	16.0	3	7.3
X-044/S-22	22	51	31	63	245	76	52	19.0	2	9.3
X-044/S-26	26	65	35	80	279	77	60	26.5	2	13.5
X-044/S-32	32	88	40	86	352	114	65	40.0	1	22.0

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	D inch	H inch	K inch	P1 inch	T inch	WLL lbs	Box Quantity	Mass lbs
X-044/S-07	5/16	0.98	0.47	0.90	3.86	1.10	0.78	5500	30	1.10
X-044/S-10	3/8	1.26	0.59	1.22	4.76	1.42	0.90	8800	20	2.20
X-044/S-13	1/2	1.57	0.70	1.49	5.98	1.57	1.06	14700	10	3.97
X-044/S-16	5/8	1.96	0.86	1.77	7.28	1.73	1.26	22000	6	7.50
X-044/S-20	3/4	2.40	1.06	2.52	9.05	2.13	1.89	35200	3	16.09
X-044/S-22	7/8	2.00	1.22	2.48	9.64	2.99	2.05	41800	2	20.50
X-044/S-26	1	2.56	1.38	3.15	10.98	3.03	2.36	58400	2	29.76
X-044/S-32	1-17/64	3.46	1.57	3.38	13.85	4.48	2.55	88184	1	48.50

The Mount
566 Eutruria Road
Newcastle under Lyme
ST5 0SU