


Yoke Grade 10 Swivel Self Locking Hook with Ball Bearing

All Grade 10 lifting components sold by William Hackett Lifting Products comply fully with the relevant section of EN1677, ASTM A952/A and DIN PAS 1061. The grade 10 components are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

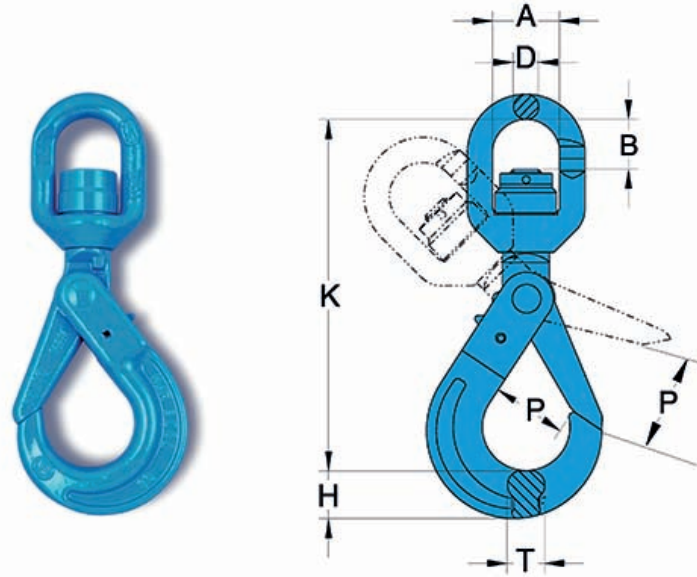

METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	B mm	D mm	H mm	K mm	P mm	T mm	WLL tonnes	Box Quantity	Mass Kg
X-027N-06	6	32	22	12	19	149	28	15	1.4	20	0.70
X-027N-07	7,8	36	29	13	24	186	34	20	2.5	12	1.20
X-027N-10	10	41	34	16	30	218	44	26	4.0	7	2.00
X-027N-13	13	46	43	21	39	276	51	30	6.7	4	4.10
X-027N-16	16	61	50	23	49	329	60	36	10.0	3	7.20
X-027N-20	20	74	82	25	65	387	70	53	16.0	2	13.00

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	B inch	D inch	H inch	K inch	P inch	T inch	WLL lbs	Box Quantity	Mass lbs
X-027N-06	1/4	1.22	0.86	0.47	0.74	5.86	1.14	0.59	3000	20	1.54
X-027N-07	5/16	1.41	1.14	0.55	0.94	7.32	1.34	0.78	5500	12	2.86
X-027N-10	3/8	1.57	1.33	0.63	1.18	8.66	1.73	1.02	8800	7	4.40
X-027N-13	1/2	1.81	1.69	0.86	1.53	10.51	2.04	1.18	14700	4	9.48
X-027N-16	5/8	2.36	1.96	0.94	1.93	12.91	2.36	1.41	22000	3	16.09
X-027N-20	3/4	2.95	3.22	1.02	2.44	15.27	3.54	1.88	35000	2	28.66

The Mount
 566 Eutruria Road
 Newcastle under Lyme
 ST5 0SU