


Yoke Grade 8 Swivel Self Locking Hook with Ball Bearing

All Grade 8 lifting components sold by William Hackett Lifting Products comply fully with the relevant section of EN1677, they are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

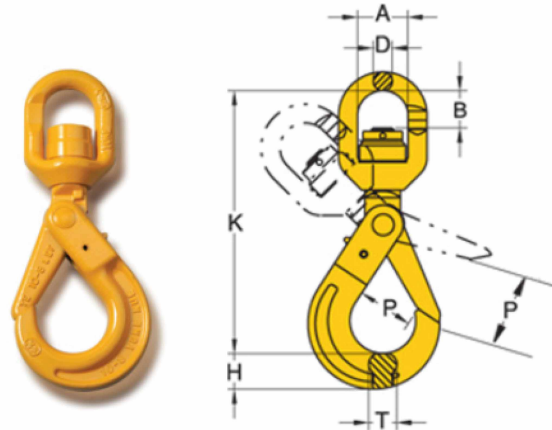

METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	B mm	D mm	H mm	K mm	P mm	T mm	WLL tonnes	Box Quantity	Mass Kg
8-027N-07	7, 8	36	29	14	24	186	34	20	2.00	12	1.20
8-027N-10	10	40	34	16	30	220	44	26	3.15	7	2.00
8-027N-13	13	46	43	22	39	267	52	30	5.30	4	4.20
8-027N-16	16	60	50	24	49	328	60	36	8.00	3	7.30
8-027N-20	20	75	82	26	62	388	90	48	12.50	2	11.70
8-027N-22	22	97	95	33	63	457	80	49	15.00	1	18.00
8-027N-26	26	123	115	52	69	535	99	56	21.20	1	32.00
DA-027N-32	32	123	115	42	81	583	120	63	32.80	1	38.50

IMPERIAL SPECIFICATIONS

Part Code	Chain Size mm	A inch	B inch	D inch	H inch	K inch	P inch	T inch	WLL lbs	Box Quantity	Mass lbs
8-027N-07	1/4 - 5/16	1.42	1.14	0.51	0.94	7.32	1.34	0.79	4500	12	2.60
8-027N-10	3/8	1.63	1.34	0.62	1.19	8.66	1.77	1.02	7100	7	4.40
8-027N-13	1/2	1.81	1.70	0.83	1.57	10.51	2.09	1.19	12000	4	9.00
8-027N-16	5/8	2.36	1.97	0.91	1.93	12.91	2.44	1.42	18100	3	16.10
8-027N-20	3/4	2.91	3.23	1.02	2.36	15.28	3.54	1.91	28300	2	25.10
8-027N-22	7/8	3.82	3.74	1.30	2.48	17.99	3.14	2.12	34200	1	39.90
8-027N-26	1	4.84	4.53	2.05	2.72	21.06	3.90	2.20	47700	1	65.00
DA-027N-32	1-17/64	4.84	4.53	1.65	3.19	22.95	4.72	2.48	72310	1	85.00

The Mount
 566 Eutruria Road
 Newcastle under Lyme
 ST5 0SU