


Yoke Insulated Blank Swivels

Yoke Insulated Blank Swivels with Ball Bearing

All Grade 8 lifting components sold by William Hackett Lifting Products comply fully with the relevant section of EN1677, they are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

- Individually tested to resist 1000 Volts insulated with Test certificate
- Designed for protection of overhead crane during welding operations on suspended loads
- Design Factor 4 : 1 proof tested and certified

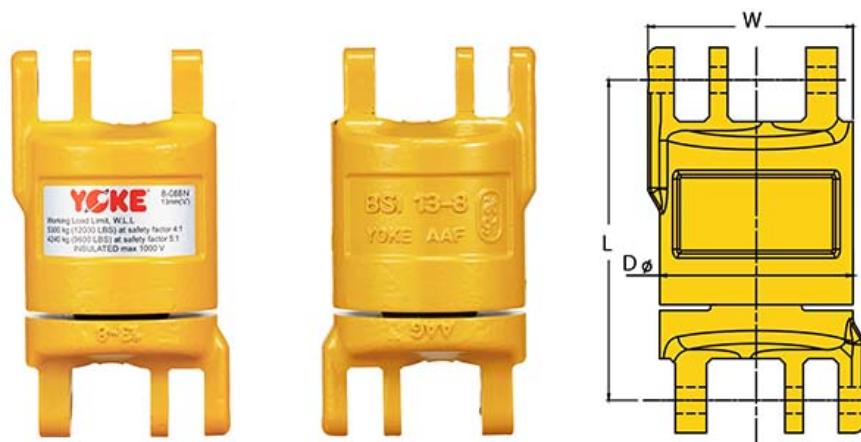

METRIC SPECIFICATIONS

Part Code	WLL tonnes	Chain Size mm	L mm	D mm	W mm	Box Quantity	Mass kg
8-088N-07	2.00	7, 8	75	48	50.0	36	0.51
8-088N-10	3.15	10	97	58	62.0	16	1.14
8-088N-13	5.30	13	123	74	78.5	10	2.31
8-088N-16	8.00	16	143	90	95.0	5	4.19
8-088N-20	12.50	20	164	105	110.0	3	6.40

IMPERIAL SPECIFICATIONS

Part Code	WLL lbs	Chain Size inch	L inch	D inch	W inch	Box Quantity	Mass lbs
8-088N-07	4500	1/4 - 5/16	2.95	1.88	1.96	36	1.12
8-088N-10	7100	3/8	3.82	2.28	2.44	16	2.51
8-088N-13	12000	1/2	4.84	2.91	3.09	10	5.09
8-088N-16	18100	5/8	5.63	3.54	3.74	5	9.24
8-088N-20	28300	3/4	6.45	4.13	4.33	3	14.10

The Mount
 566 Eutruria Road
 Newcastle under Lyme
 ST5 0SU