


Yoke Swivel Hoist Ring - type 203 metric thread with alloy steel washer

- Rotates through 360° and pivots 180°, rated at 100% at 90° angle.
- Manufactured from forged alloy steel, quenched and tempered.
- Manufactured and tested in accordance with EN1677-1.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts and cap screw are traceable to Test Certification.
- Bolts are Metric thread (ASME / ANSI B18.3.1M).
- Proof tested to 2.5 times the WLL. on the 4 : 1 factor.
- Fatigue rated to 1.5 times the WLL.
- Design Factor 4 : 1
- All YOKE Lifting points meet or exceed all the requirements of ASME B30.26.
- Quick and simple assembly, just a tapped hole is required.

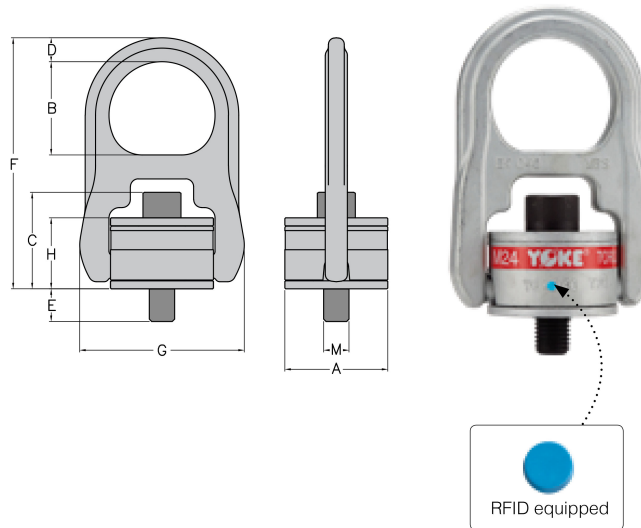

DIMENSIONAL SPECIFICATIONS

Part Code	WLL tonnes 4 : 1	Thread M	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	Torque Nm	Mass Kg
8-203-004	0.50	M8 x 1.25	40	41	41	9	17	102	65	33	10	0.4
8-203-005	0.55	M10 x 1.50	40	41	43	9	11	102	65	33	16	0.5
8-203-010	1.30	M12 x 1.75	65	58	57	15	15	158	105	45	38	1.7
8-203-019	2.40	M16 x 2.00	65	58	61	15	20	158	105	45	81	1.8
8-203-021	2.70	M20 x 2.50	65	58	65	15	25	158	105	45	136	1.8
8-203-042	5.25	M24 x 3.00	85	73	78	22	26	204	134	54	312	4.2
8-203-070	8.75	M30 x 3.50	100	80	77	25	81	218	160	58	637	6.6
8-203-110	13.75	M36 x 4.00	120	106	108	36	76	308	220	85	1005	15.0
8-203-125	15.60	M42 x 4.50	120	106	111	36	95	308	220	85	1005	16.0
8-203-135	16.90	M48 x 5.00	120	106	115	36	105	308	220	85	1350	16.0









Longer bolts available on request.

USES

Swivel Hoist Ring uses can be as follows:

- Heavy duty flexible attachment point
- Suited for lifting objects with no obvious attachment points
- Mold and die handling
- Pump and valve handling

SWIVEL HOIST RING - TYPE 203 WORKING LOAD APPLICATION FACTORS

											
Number of legs		1	2	1	2	2		2	3-4		3-4
Load Direction		0°	0°	90°	90°	0-45°	45-60°	unsymm.	0-45°	45-60°	unsymm.
Part Code	Thread	WLL tonnes									
8-203-004	M8	0.50	1.0	0.50	1.0	0.70	0.50	0.50	1.05	0.75	0.50
8-203-005	M10	0.55	1.1	0.55	1.1	0.77	0.55	0.55	1.16	0.83	0.55
8-203-010	M12	1.30	2.6	1.30	2.6	1.82	1.30	1.30	2.73	1.95	1.30
8-203-019	M16	2.40	4.8	2.40	4.8	3.36	2.40	2.40	5.04	3.60	2.40
8-203-021	M20	2.70	5.4	2.70	5.4	3.78	2.70	2.70	5.67	4.05	2.70
8-203-042	M24	5.25	10.5	5.25	10.5	7.35	5.25	5.25	11.03	7.88	5.25
8-203-070	M30	8.75	17.5	8.75	17.5	12.25	8.75	8.75	18.38	13.13	8.75
8-203-110	M36	13.75	27.5	13.75	27.5	19.25	13.75	13.75	28.88	20.63	13.75
8-203-125	M42	15.60	31.2	15.60	31.2	21.84	15.60	15.60	32.76	23.40	15.60
8-203-135	M48	16.90	33.8	16.90	33.5	23.66	16.90	16.90	35.49	25.35	16.90

Click here to view video of Yoke Load Attachment Products

<http://www.yoke.net/video/en.asp>

The Mount
566 Eutruria Road
Newcastle under Lyme
ST5 0SU