


## Grade 8 Fishing Chain

Manufactured from high quality low carbon alloy steel, this chain is manufactured on automatic chain making machines with flash butt welded joints. The chain is heat treated to meet its required loadings. All sizes of chain are proof load tested at the end of the manufacturing process. All chain is embossed at every 20th Link or 1m intervals with a batch number for purposes of traceability. Chain diameter range: 9mm – 22mm (other sizes available upon request). Chain supplied in full drum lengths or cut to specific customer requirements.

## Grade 8 Short Link Chain

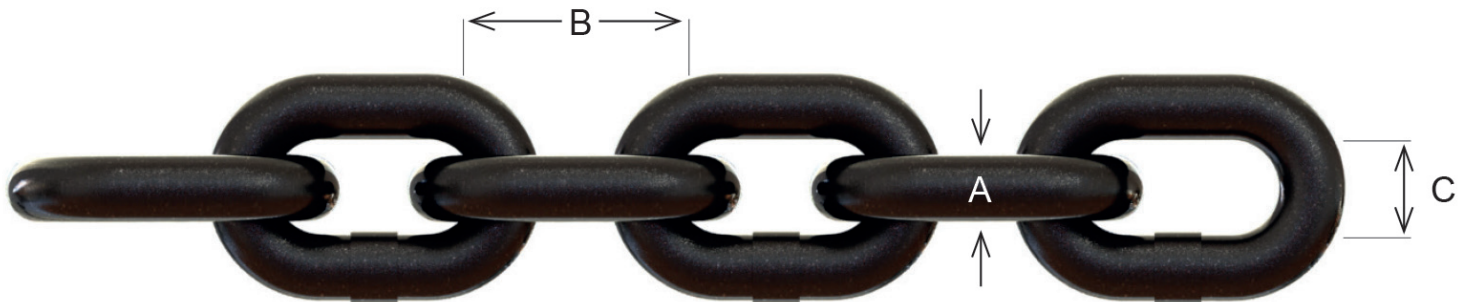


Finish: Black Painted

Part Code	Chain Size (mm)	A (mm)	B (mm)	C (mm)	M.B.L. (t)	Metre Per Drum	Weight Per M (Kg)
MB8.100	10	10	30	15	12.8	250	2.20
MB8.130	13	13	39	19.5	21.7	150	3.80
MB8.160	16	16	48	24	32.8	100	5.60
MB8.200	20	20	60	30	51.3	50	8.50

## Grade 8+ Mid Link Chain


William Hackett branded Grade 8+ mid link chain is specially manufactured for use in critical applications within the trawl and offers increased breaking strength and wear resistance over the standard Grade 8 chain with shock loading and ductility also improved.

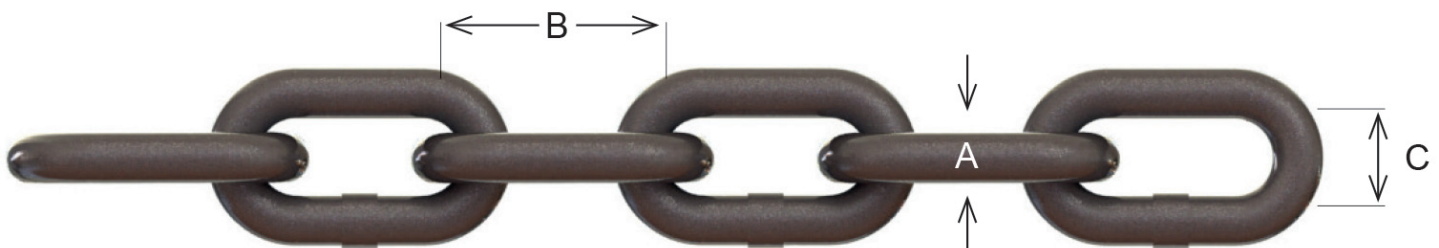

Finish: Black Painted

Part Code	Chain Size (mm)	A (mm)	B (mm)	C (mm)	M.B.L. (t)	Metre Per Drum	Weight Per M (Kg)
AM9.100	10	10	40	14.0	13.6	250	2.00
AM9.130	13	13	52	18.0	23.0	550 (Crate)	3.40
AM9.160	16	16	64	22.4	34.8	440 (Crate)	5.10
AM9.200	20	20	79	28.0	54.4	220 (Crate)	7.20
AM9.220	22	22	86	30.8	62.7	60	9.60

## Grade 8 Long Link Chain

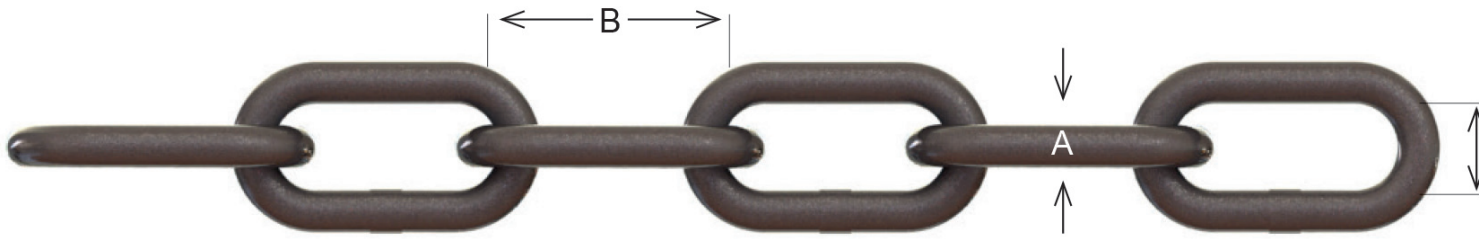

Finish: Yellow Painted

Part Code	Chain Size (mm)	A (mm)	B (mm)	C (mm)	M.B.L. (t)	Metre Per Drum	Weight Per M (Kg)
AL1.090	9	9.2	54	14.5	10.9	300	1.40
AL1.110	11	11.2	63	18.0	16.2	200	2.30
AL1.130	13	13.0	80	24.0	21.9	150	3.00
AL1.160	16	16.0	100	24.0	33.2	110	4.40
AL1.200	20	20.0	96	27.0	51.8	60	7.40

The Mount  
566 Eutruria Road  
Newcastle under Lyme  
ST5 0SU