





TECHNICAL SHEET FA 20 103 00A


COMPACT FALL ARRESTER SLIDING ON KERNMANTLE ROPE

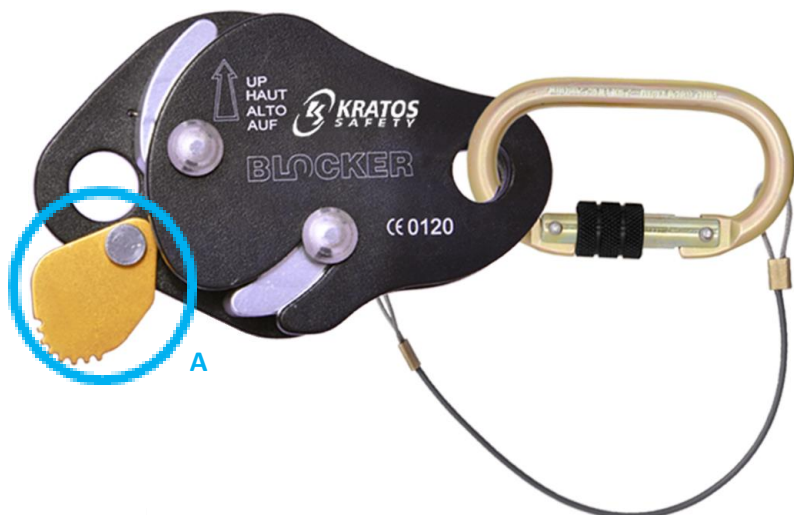

EN353-2

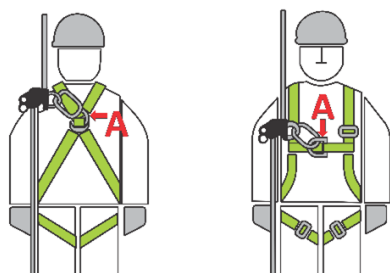

EN358



Compact fall arrester sliding on Kernmantle rope, multi-use

- **Fall arrest feature:** works on the KRATOS SAFETY anchor line in polyamide Kernmantle rope **diam. 11 mm.** - ref. FA 20 103 10, FA 20 103 20, FA 20 103 30, FA 20 103 40, FA 20 103 50.
- **Work positioning lanyard feature:** works on 5 mtr polyamide Kernmantle rope KRATOS SAFETY **diam. 12 mm.** – ref. of the system FA 40 906 50.
- Easy opening / closing system and locking through karabiner.
- Has a manual locked position to allow work on inclined surface and work positioning. (A)
- Karabiner cannot be lost.
- **Breaking strength > 15 kN.**

Connector: 1 steel screw-locking karabiner, ref. FA 50 101 17 for attachment to a harness.

Compliance: EN 353-2:2002 and EN 358:2000.

Material of components:

Rope grab: aluminium

Connector : steel

	Weight:
	0.35 kg

KRATOS SAFETY

ZI les Portes du Dauphiné
4, rue de l'Aigue
69780 Saint Pierre de Chandieu – FRANCE

Tel : +33 (0)4 72 48 78 27

Fax : +33 (0)4 72 48 58 32

www.kratossafety.com / info@kratossafety.com

HS CODE

56090000

CARTON SIZE / PCS.

60x40x24 cm / 20

AET N°8086 I1 E1

Satra Technology Centre, N°0321

Wyndham Way, Telford Way, Kettering
Northamptonshire, NN16 8SD, United Kingdom

ARTICLE 11 GB07/73551

SGS United Kingdom Ltd., N°0120

Unit 202B, Worle Parkway,
Weston-super-Mare, BS22 6WA, United Kingdom